

# VSI OpenVMS x86-64 V9.2-1 Installation Guide

Document Number: DO-DVXINS-01A

Publication Date: April 2023

**Revision Update Information:** This is a new manual.

**Operating System and Version:** VSI OpenVMS x86-64 Version V9.2-1

---

## Installation Guide



VMS Software

---

Copyright © 2023 VMS Software, Inc. (VSI), Boston, Massachusetts, USA

### Legal Notice

Confidential computer software. Valid license from VSI required for possession, use or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

The information contained herein is subject to change without notice. The only warranties for VSI products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. VSI shall not be liable for technical or editorial errors or omissions contained herein.

HPE, HPE Integrity, HPE Alpha, and HPE Proliant are trademarks or registered trademarks of Hewlett Packard Enterprise.

<b>Preface .....</b>	<b>v</b>
1. Introducing OpenVMS x86-64 V9.2-1 .....	v
2. Intended Audience .....	v
3. Using the VSI Customer Portal .....	v
4. Other Related Documentation .....	v
<b>Chapter 1. Preparing to Install VSI OpenVMS x86-64 V9.2-1 .....</b>	<b>1</b>
1.1. Tested Platforms .....	1
1.2. Platforms Documentation .....	2
1.2.1. Recommended Settings for Virtual Machines .....	2
1.3. Licensing .....	3
1.3.1. Using VMware vSphere Hypervisor Licenses .....	4
<b>Chapter 2. Creating and Configuring a Virtual Machine .....</b>	<b>7</b>
2.1. Creating a VMware ESXi Virtual Machine .....	7
2.1.1. Completing Your VMware ESXi Virtual Machine Configuration .....	10
2.2. Creating a KVM/QEMU Virtual Machine .....	11
2.2.1. Completing Your KVM/QEMU Virtual Machine Configuration .....	11
2.3. Creating a VirtualBox Virtual Machine .....	14
2.3.1. Completing Your VirtualBox Virtual Machine Configuration .....	15
<b>Chapter 3. Installing and Upgrading VSI OpenVMS x86-64 V9.2-1 on a Guest Virtual Machine .....</b>	<b>17</b>
3.1. Installing VSI OpenVMS x86-64 V9.2-1 .....	17
3.2. Upgrading to VSI OpenVMS x86-64 V9.2-1 .....	23
3.2.1. Creating a Non-Shadowed Target Disk From a Shadowed Disk .....	23
3.2.2. Upgrading a Non-Shadowed System Disk .....	24
<b>Chapter 4. Networking Options .....</b>	<b>31</b>
4.1. Setting Up DECnet Phase IV .....	31
4.2. Configuring VSI TCP/IP Services .....	31
4.3. Configuring VSI OpenSSH .....	32
<b>Appendix A. Setting up a VMS Cluster .....</b>	<b>35</b>
A.1. Initial Preparation .....	36
A.2. Creating the First Virtual Machine .....	36
A.3. Starting the Virtual Machine .....	38
A.4. Adding a Node Using a Copy of an Existing System Disk .....	39
A.5. Creating the Second Virtual Machine .....	40
A.6. Finalizing Cluster Setup .....	40
A.7. Saving Your Cluster Setup .....	42
<b>Appendix B. Sample Installation and Upgrade Logs .....</b>	<b>45</b>
B.1. Sample Installation Log .....	45
B.2. Sample Upgrade Log .....	60



# Preface

VMS Software, Inc. (VSI) is an independent software company licensed by Hewlett Packard Enterprise to develop and support the OpenVMS operating system.

## 1. Introducing OpenVMS x86-64 V9.2-1

This manual provides instructions for booting and installing VSI OpenVMS Version 9.2-1 for x86-64 (hereafter referred to as OpenVMS x86-64 V9.2-1) using an ISO file on guest virtual machines.

## 2. Intended Audience

Users of this manual are expected to obtain and reference any additional documentation specific to their hardware and environment. Users are expected to know how to identify the various devices involved in their installation and be familiar with the console commands that are available on their system and virtual machines.

Users should be familiar with the virtual machine environments they plan to use for running OpenVMS x86-64 V9.2-1 as a guest virtual machine.

Make sure you read the Release Notes, Installation Guide, and Boot Manager Guide prior to installing OpenVMS x86-64 V9.2-1.

## 3. Using the VSI Customer Portal

See the VSI OpenVMS x86-64 V9.2-1 announcement email for information about how to log issues against the V9.2-1 release and how to use the VSI Services Portal at <https://sp.vmssoftware.com>.

## 4. Other Related Documentation

- *VSI OpenVMS x86-64 V9.2-1 Release Notes*
- *VSI x86-64 Cross-tools Kit Installation and Startup Guide*
- *VSI OpenVMS Linker Manual*
- *VSI Calling Standard Manual*
- *VSI OpenVMS x86-64 Boot Manager User Guide*
- VSI OpenVMS TCP/IP Services V6.0 documentation at [VSI Documentation portal \[https://docs.vmssoftware.com/\]](https://docs.vmssoftware.com/)
- Third party documentation as cited throughout this document



# Chapter 1. Preparing to Install VSI OpenVMS x86-64 V9.2-1

## 1.1. Tested Platforms

### VirtualBox

VSI has tested OpenVMS x86-64 V9.2-1 with Oracle VirtualBox 7.0 and regularly installs patches when they are available.

### KVM

VSI has tested OpenVMS x86-64 V9.2-1 with the following Kernel-based Virtual Machine (KVM) products. The following table includes the Linux version and QEMU version:

Linux Distribution	QEMU Version (package information)
openSUSE Leap 15.4	6.2.0 (6.2.0-150400.37.8.2)
Rocky Linux 8.6	6.2.0 (qemu-kvm-6.2.0-11.module+el8.6.0+1052+ff61d164.6)
Ubuntu 22.04 LTS	6.2.0 (Debian 1:6.2+dfsg-2ubuntu6.5)

### VMware

VSI has tested OpenVMS x86-64 V9.2-1 with the following VMware products:

VMware Product	Version Tested by VSI
Workstation Pro	V16.2.3
Workstation Player	V17.0.1
Fusion Pro	V13.0
ESXi	V6.7.3, V7.0.2, V7.0.3

---

### Warning

If you choose to upgrade from a previous version of **VMware Fusion** to VMware Fusion **V13**, from a previous version of **VMware Workstation** to VMware Workstation **V17**, or from a previous version of **VMware ESXi** to VMware ESXi **V8**, you will not be able to run any VMs with VSI OpenVMS x86-64 versions prior to E9.2-1. However, VMs running VSI OpenVMS x86-64 V9.2 can be upgraded to VSI OpenVMS x86-64 E9.2-1 and will run under VMware Fusion V13/VMware Workstation V17/VMware ESXi V8.

---

### Important

Note that not all VMware license types are currently supported for running VSI OpenVMS x86-64 V9.2-1. For more information, see *VSI OpenVMS x86-64 V9.2-1 Release Notes*.

See the *VSI OpenVMS x86-64 V9.2-1 Release Notes* for more information about supported virtual environments.

## 1.2. Platforms Documentation

Due to the many third-party platform products that you can use with VSI OpenVMS x86-64 V9.2-1, VSI cannot provide the complete documentation for these products. The following table lists each product and a URL to its documentation web site:

<b>Oracle VirtualBox</b>	<a href="https://www.virtualbox.org/wiki/End-user_documentation">https://www.virtualbox.org/wiki/End-user_documentation</a>
<b>Redhat Enterprise Linux</b>	<a href="https://access.redhat.com/documentation/en-us/red_hat_enterprise_linux/9">https://access.redhat.com/documentation/en-us/red_hat_enterprise_linux/9</a>
<b>VMware ESXi Enterprise</b>	<a href="https://docs.vmware.com/en/VMware-vSphere/index.html">https://docs.vmware.com/en/VMware-vSphere/index.html</a>
<b>VMware Fusion</b>	<a href="https://docs.vmware.com/en/VMware-Fusion/index.html">https://docs.vmware.com/en/VMware-Fusion/index.html</a>
<b>VMware Workstation Pro</b>	<a href="https://docs.vmware.com/en/VMware-Workstation-Pro/index.html">https://docs.vmware.com/en/VMware-Workstation-Pro/index.html</a>
<b>VMware Workstation Player</b>	<a href="https://docs.vmware.com/en/VMware-Workstation-Player/index.html">https://docs.vmware.com/en/VMware-Workstation-Player/index.html</a>
<b>Ubuntu</b>	<a href="https://help.ubuntu.com/">https://help.ubuntu.com/</a>
<b>openSUSE Leap</b>	<a href="https://doc.opensuse.org/">https://doc.opensuse.org/</a>

### 1.2.1. Recommended Settings for Virtual Machines

While the actual configuration of the VM should reflect your expected system usage, the expected system usage might be a hard thing to predict. However, the benefit of using a virtual machine is, you can always reconfigure it as needed for the current situation. VSI recommends that your OpenVMS x86-64 virtual machine be configured with the following minimum settings:

- **Memory:** 8 GB

Note that if your installation fails due to the lack of memory, you can increase the amount of it for the duration of the installation and then, if needed, reduce it back.

- **Operating system:** Other or 64-bit
- At least **two virtual disks** (SATA/AHCI, LSI Logic Parallel for VMware; SCSI for KVM; AHCI/SATA, LsiLogic, and VirtIOSCSI for VirtualBox). The disk used as the system disk should be at least 15 GB in size. The second disk is recommended for Dump Off the System Disk (DOSD) and should be at least 8 GB in size. Larger configurations may require a larger dump device.
- **Boot Option:** if present, disable Secure Boot. OpenVMS requires UEFI or EFI (BIOS is not supported)
- **Console Communication:** serial port using a raw TCP connection for VMWare and Virtual Box, or virsh for KVM VMs.

---

#### Note

Currently, only COM1 serial port is supported.

---



- An additional **serial line** for non-console login.
- **Network:** Adapter Type or Device Model of e1000 (ESXi or KVM); 82540EM (VirtualBox)
- **CD/DVD device** (physical or virtual) with the OpenVMS installation kit (the .ISO file) assigned to it
- **CPU** that meets the following requirements:
  - Intel or AMD x86 CPU
  - 64-bit Instruction set
  - NX processor bit (NX)
  - Streaming SIMD Extensions 4.1 (SSE4.1)
  - Virtualization Technology (VT-x)
  - XSAVE instructions
  - Time Stamp Counter (TSC)
  - Advanced Programmable Interrupt Controller (APIC)
  - Memory Type Range Registers (MTRR)

Most Intel CPUs from 2016/AMD (Zen) CPUs from 2017 and later support these processor features.

- **Minimum number of CPUs:** 2
- **Chipset**, where offered: ICH9 (VirtualBox); Q35 (KVM)

## 1.3. Licensing

During the installation, you will be prompted to register Product Authorization Keys (PAKs) for the base operating environment and any layered products that are not already included in the base OS.

A PAK is represented as a text structured file containing a series of named fields and unique values that were generated by VSI. You have the option to register your PAKs during the installation, or after the installation is complete. VSI recommends you register your PAKs after the installation by converting the PAK file(s) that VSI provided, renaming it with a .com extension, and then executing that file; this will register all your licenses at once. However, you must either issue the `LICENSE LOAD` command or reboot to make them active. If you choose to register your PAKs *during* the installation, you can either type the values of each requested field, or copy-and-paste the values into the console line by line (assuming your console connection supports this action, such as using a terminal emulator).


Below is an example of what a PAK might look like:

```
$ LICENSE REGISTER OPENVMS-X86-BOE -  
/ISSUER=VSI -  
/AUTHORIZATION=1-VSI-SAMPLAUTH-0001 -  
/PRODUCER=VSI -  
/UNITS=32 -  
/TERMINATION_DATE=31-OCT-2023
```

```
/OPTIONS=(PCL,X86_64) -
/CHECKSUM=X-XXXX-XXXX-XXXX-XXXX
```

### 1.3.1. Using VMware vSphere Hypervisor Licenses

Use the method described below to run VMware vSphere Hypervisor on an ESXi server with a basic license (not Enterprise or Enterprise Plus). You must use serial ports within the same ESXi server.

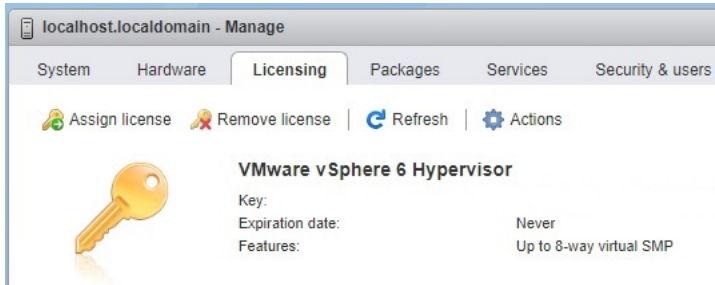

Use the named pipe functionality to map COM1/OPA0 : on the VMS virtual machine to a pipe on a management server on which a terminal emulator is installed.

With the VM system in client mode, use the following syntax: `\\.pipe_XXX`


With the management system in server mode, use the following syntax: `\\.pipe_XXX`, where `XXX` is a unique string for each VM.


#### Note

For the named pipe connection to work correctly, both the server and client must reside on the host system.


The terminal emulator should be set for serial connection at 115200 baud.


The following two figures show how to set up pipes for a local terminal emulator-based console.

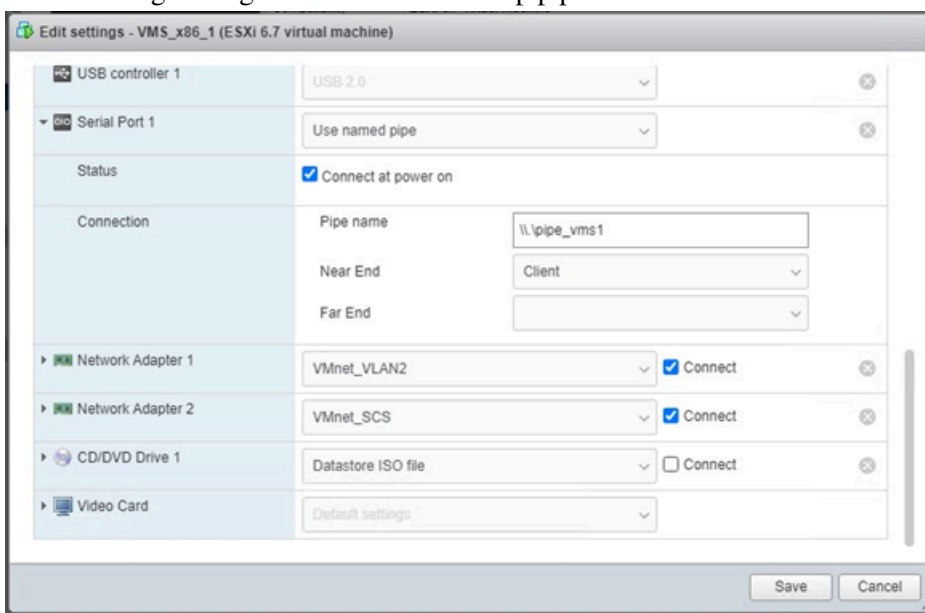

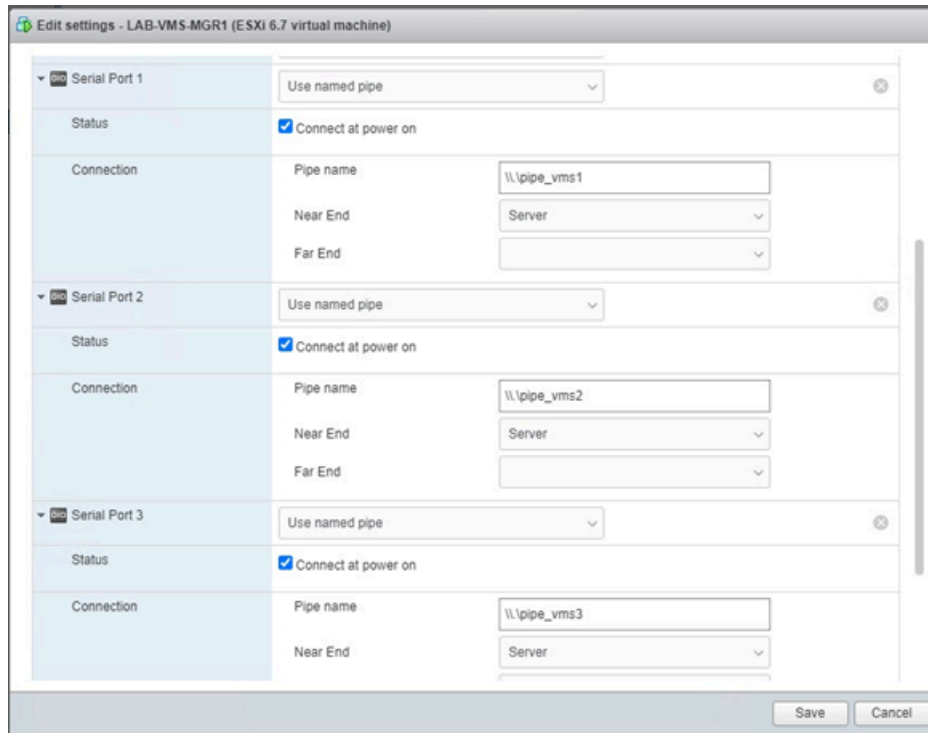

The following two figures show how to set up pipes between two local virtual machines where one plays the role of VMS console. This could be a virtual machine guest running any OS that supports a terminal emulator.

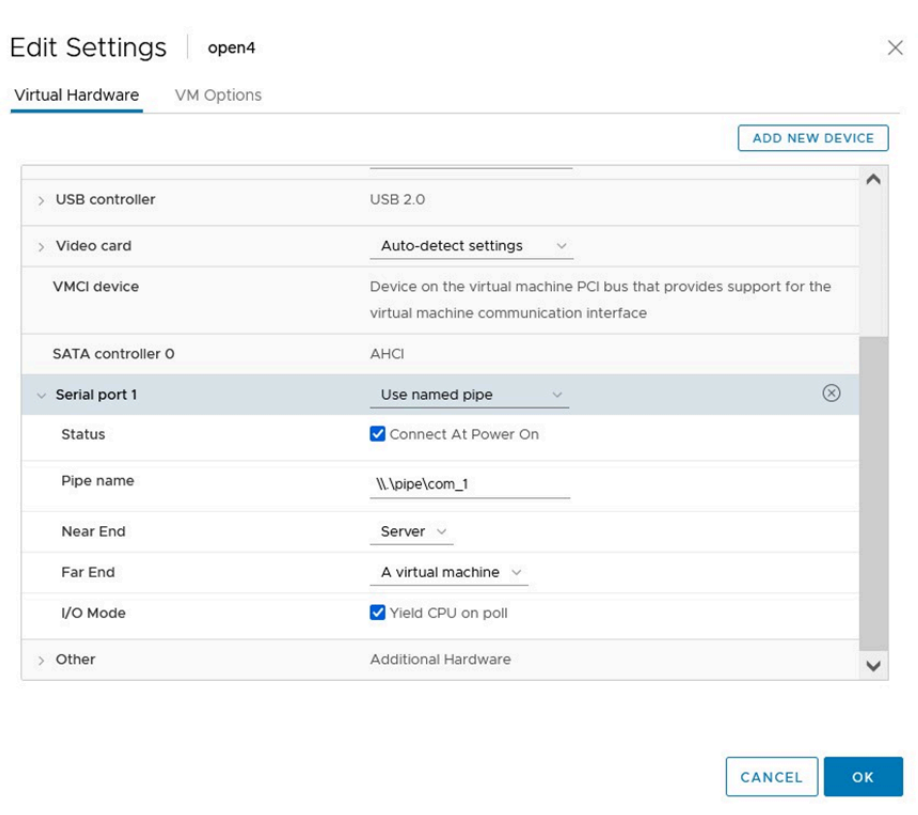

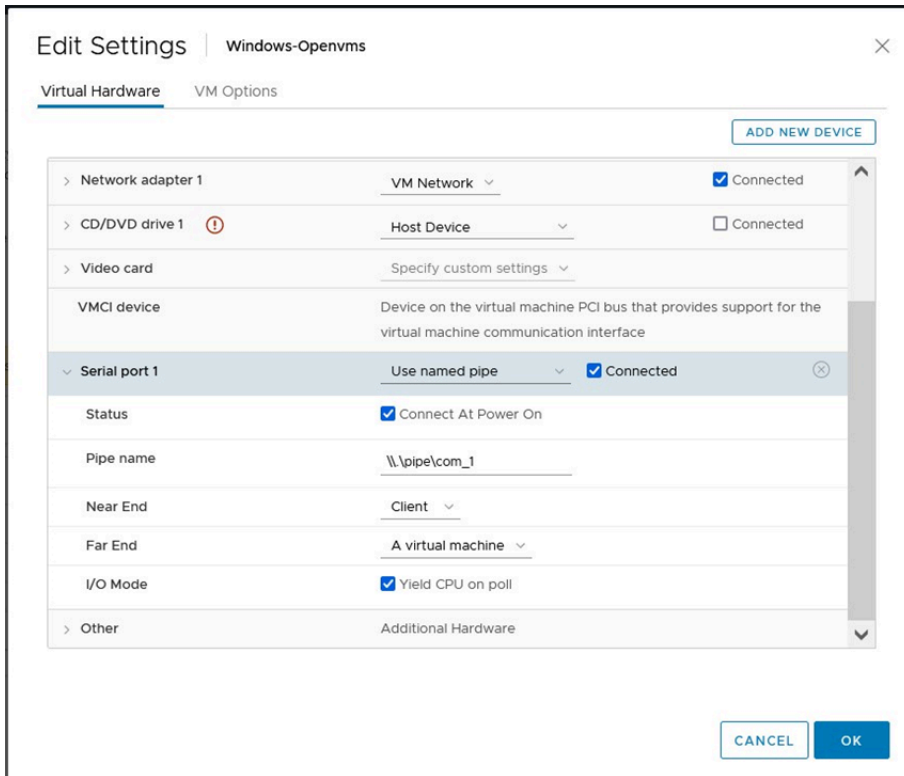

# Chapter 2. Creating and Configuring a Virtual Machine

This chapter provides basic instructions for creating and configuring a guest virtual machine (VM) on VMware ESXi, KVM, and Oracle VirtualBox. In these instructions, VSI assumes that the application for managing the VM guests is already installed and configured.

## 2.1. Creating a VMware ESXi Virtual Machine

---

### Note

The following instructions have been written for VMware ESXi 7.0.

---

To create a virtual machine on a VMware ESXi host, follow these steps:

1. Download, unzip, and copy the VSI OpenVMS x86-64 V9.2-1 ISO file to an area that is locally accessible to the browser used to connect to the VMware ESXi host client.
2. In your browser, enter the ESXi host IP address to bring up the VMware ESXi environment. At the login screen, provide your user credentials and log in.
3. On the left side of the VMware ESXi window, go to **Navigator > Storage >**. On the right side of the window, click **Datastore browser**.
4. In the **Datastore browser** pop-up window, left-click the datastore where you want to save the ISO kit, then click **Upload** and navigate to the ISO kit (which should be on your browser's local system). Then, click **Open**.

---

### Note

Once the upload starts, you can close the **Datastore browser** window.

---

5. To create a virtual machine using the ISO file, go to **Host** menu, then click the **Create/Register VM** button.
6. In the **New virtual machine** window, perform the following steps.
  - a. On the **Select creation type: Create a new virtual machine** page, click **Next**.
  - b. On the **Select a name and guest OS** page, specify the following information:
    - i. **Name** – Set the name for your virtual machine. Keep in mind, the name must be unique in your environment.
    - ii. **Compatibility** – VSI recommends accepting the default value
    - iii. **Guest OS family** – Other
    - iv. **Guest OS version** – Other (64-bit)

Click **Next**.

- c. On the **Select storage** page, select the datastore that will contain the disk image(s) and files for your VM. Click **Next**.
- d. On the **Customize settings** page, click **Virtual Hardware** and specify values for the following fields:
  - i. **CPU** – set the number of CPUs. VSI recommends a minimum of 2.
  - ii. **Cores per Socket** – select a value appropriate for your VM and licensing needs.

---

### Note

The **Sockets** field updates automatically depending on the number of cores per socket that you select.

---

- iii. **Memory/RAM** – Set the appropriate amount of RAM for your VM. VSI recommends a minimum is 8 GB.
- iv. **SCSI Controller 0** – if this controller does not exist, and you would like to add it to your VM, click the **Add other device** button, above the **CPU** field. Then, select **SCSI controller** from the dropdown menu. Then, make sure **LSI Logic Parallel** is selected from the list. Other SCSI controllers are not supported in the current release.  
  
**SATA Controller 0** – if this controller does not exist, and you would like to add it to your VM, click the **Add other device** button, above the **CPU** field. Then, select **SATA controller** from the dropdown menu.
- v. **Hard disk 1** – select disk type and set the size. VSI recommends setting up your VM with at least two disk images – one for the system files, and another for the sysdump.dmp (DOSD) and data files. VSI recommends a minimum of 15 GB for the system disk. Also, set the following parameters:
  - A. **Controller location** on the left side – select the controller you wish to use: **SATA** or **SCSI**.
  - B. **Controller location** on the right side – select the bus and LUN assignment for your disk (or accept the default value).

---

### Note

Make sure *not* to use the same bus/LUN setting for any of your disks and/or CDRoms.

---

- vi. To add an additional disk (intended for the sysdump.dmp (DOSD) and data files), perform the following steps and settings:
  - A. Click the **Add hard disk** button just above the CPU field.
  - B. Select **New standard hard disk**.

- C. **New Hard disk** – select disk type and set the size.
  - I. **Controller location** on the left side – select the controller you wish to use: **SATA** or **SCSI**.
  - II. **Controller location** on the right side – select the bus and LUN assignment for your disk (or accept the default value).

---

### Note

Make sure *not* to use the same bus/LUN setting for any of your disks and/or CDROMs.

---

- vii. **Network Adapter 1** – ensure the correct adapter is selected from the drop-down list. The correct adapter depends on your environment.
  - **Adapter Type** – select **E1000** from the list.
- viii. **CD/DVD Drive 1** – select the Datastore ISO file value.
  - A. In the Datastore browser pop-up window, navigate to the VSI OpenVMS ISO file that you downloaded earlier and click **Select**.
  - B. **CD/DVD Media** – ensure the path to the ISO is correct.
  - C. **Controller location** on the left side – ensure the correct controller is selected for the new disk.
  - D. **Controller location** on the right side – select the bus and LUN assignment for the new hard disk.
- ix. VSI OpenVMS uses a serial port for I/O, so one has to be added on the VM that runs it. To set up the serial port, follow these steps:
  - A. Click **Add other device**.
  - B. Select **Serial port**.
  - C. **New Serial Port** – select the appropriate value from the **Use network** dropdown list.
    - I. **Connection Direction** – ensure **Server** is selected.
    - II. **Connection Port URI** – notice the warning at the top, indicating the format to use. Type `tcp://<your ESXi host IP>:<port ID>`. The port ID must be unique on the ESXi host. Once you are satisfied with the URI, click anywhere in the window to validate the URI format and remove the warning.
- e. On the **Customize settings** page, click **VM Options** and specify the following information:
  - i. Click **Boot Options** to expand the settings.
  - ii. **Firmware** – from the dropdown list, select **BIOS**.

- iii. **Enable UEFI secure boot** – make sure this checkbox *is not* checked.
- iv. **Force BIOS setup** – make sure this checkbox *is* checked.
- v. Click **Next**.
- f. On the **Ready to complete** page, review the settings. If everything is correct, click **Finish**.

## 2.1.1. Completing Your VMware ESXi Virtual Machine Configuration

1. Once you have created your VM, go to the **Virtual Machines** area in the VMware ESXi environment and select the VM you created.
2. Open the Customize Settings window. Go to **VM Options>Firmware** and change the value from **BIOS** to **EFI**.
3. Your VM information, hardware configuration, and power controls will now be displayed. Click the **Power on** button at the top.


---

### Note

If some of the network devices or bootable storage devices are missing, VSI recommends adding an additional EFI parameter to the guest settings: This can be done by navigating to **VM Options > Advanced > Edit Configuration** and setting the key/value pair **efi.quickBoot.enabled** to **FALSE**.

---

4. After the power on process is successfully completed, you will see the the blue BIOS screen of your VM in the console preview pane in the top left.
5. Click anywhere in the console preview pane to open up the ESXi browser console to the VM. The platform Boot Manager screen will be displayed. If needed, configure the screen size (in the menu, navigate to **Boot Manager screen>Enter setup>Configure screen size>Set screen size>Commit changes and exit>Exit Boot Maintenance Manager**).
6. Navigate to **Configure boot options > Enable or disable boot options** screen and enable/disable the lines as demonstrated:

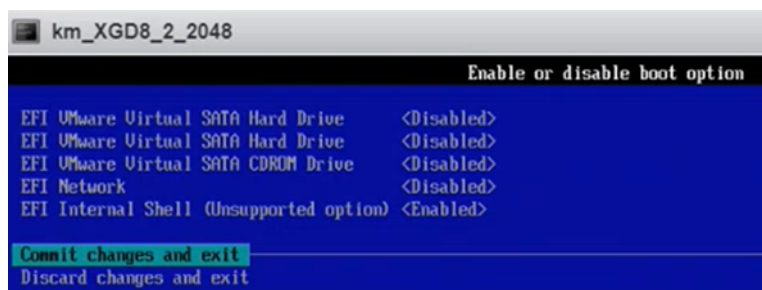

7. Select **Commit changes and exit > Exit the Boot Maintenance Manager**.
8. Back on the blue Boot Manager screen, select **EFI Internal Shell (Unsupported option)**, and press Enter.

Your virtual machine is now ready to have VSI OpenVMS x86-64 installed on it. See Chapter 3.



## 2.2. Creating a KVM/QEMU Virtual Machine

---

### Note

The following instructions have been written for KVM/QEMU 5.2.

---

To create a virtual machine on KVM/QEMU virtual machine, follow these steps:

1. Download, unzip, and copy the VSI OpenVMS x86-64 V9.2-1 ISO file to an area that is locally accessible to the KVM host server.
2. Run the Virtual Machine Manager and select **File > New Virtual Machine** from the main menu. The **Create a new Virtual Machine** wizard opens.
3. Select **Local install media (ISO image or CDROM)** and click **Forward**.
4. Click **Browse**.
5. In the *Locate ISO media volume* window, click the **Browse Local** button, then navigate to the VSI OpenVMS V9.2-1 ISO file, select it, and click **Open**.
6. Uncheck the **Automatically detect from the installation media/source** box and type in the search box **Generic** and select the value that contains the text 'unknown'. Click **Forward**.
7. Select the amount of memory and number of CPUs to use for your VM. VSI recommends a minimum of 8 GB memory and 2 CPUs. Click **Forward**.
8. The **Create a disk image for the virtual machine** option is selected by default. Set the disk size for your VM; VSI recommends a minimum of 8 GB

---

### Note

If you don't want your images to be saved in the default directory `/var/lib/libvirt/images` with default file names, you should either select **Select or create custom storage**, then click **Manage** and create your desired storage volumes for your VM disk images. Be sure to select the desired volume, then click the **Choose Volume** button.

---

Click **Forward**.

9. Give your virtual machine a name, review your VM's settings, and check the **Customize configuration before install** checkbox. Click the arrow next to **Network Selection** and verify your system is using a Bridge device with the appropriate Device name. Then, click **Finish**.

### 2.2.1. Completing Your KVM/QEMU Virtual Machine Configuration

1. Once you have created your VM, a `<VM_name>` on QEMU/KVM window opens. Set the following settings.
  - a. Go to **Overview**, set the following settings.
    - i. From the **Chipset** dropdown, select **Q35**.

- ii. From the **Firmware** dropdown, select the most basic **UEFI x86\_64:/usr/share/\*code.\*** option.
- iii. Click **Apply**.
- b. If you wish to use **SCSI** disks, click the **Add Hardware** button located at the lower left.
  - i. Go to **Controller**.
  - ii. From the **Type** drop-down list, select **SCSI**.
  - iii. Ensure the **Model** drop-down list is set for **VirtIO SCSI**.
  - iv. Click **Apply**.
- c. Go to **IDE Disk 1 > Disk bus**.
  - i. For the **Disk bus**, select either **SATA** or **SCSI**, whichever is appropriate for your environment. Other disk controller types are currently not supported.
  - ii. Click **Apply**.
- d. VSI recommends setting up your VM with at least two disk images – one for the system files, and another for the sysdump.dmp (DOSD) and data files. To add an additional disk (aside from the system disk), click the **Add Hardware** button in the lower left corner of the screen, then perform the following steps:
  - i. Go to **Storage**.
  - ii. Select either one of the two options:
    - **Create a disk image for the virtual machine** – will create a new qcow2 disk image which will be saved in the default location with a default name.
    - **Select or create custom storage** – will allow you to create a disk volume and specify the desired storage location, name, and disk format.
  - iii. Set your disk size as well as (if you clicked **Select or create custom storage**) the location, name, and/or format.
  - iv. Make sure that **Device type:** is set to **Disk device**.
  - v. Select either **SCSI** or **SATA** from the **Bus Type** drop-down list. Other disk controller types are currently not supported.
  - vi. Click **Finish**.
  - vii. Repeat these steps for each additional disk you wish to add to your configuration.
- e. Go to **IDE CDROM 1**.
  - i. To specify **Source path**, click **Browse**, navigate to the VSI OpenVMS V9.2-1 ISO file and select it. Then, click the **Choose Volume** button.

- ii. For the **Disk bus**, select either **SATA** or **SCSI**, whichever is appropriate for your environment. Other disk controller types are currently not supported.
    - iii. Click **Apply**.
  2. Go to **NIC:<your\_mac\_address>**
    - a. From the **Device model:** dropdown, select **e1000e**.
    - b. Click the field that shows **e1000e** and delete the **e** at the end, so that only **e1000** remains.
    - c. Click **Apply**.
  3. Click **Begin Installation**.

4. The Virtual Machine Manager Console will now be displayed with either the EFI Shell> prompt or the BootMgr> prompt shown. The screen that is displayed is dependent on which operating system that KVM is installed on and on which firmware .bin file was selected when the VM was created.
5. Regardless of which prompt is displayed, type `EXIT` and immediately press the **ESC** key repeatedly until the blue platform Boot Manager screen is displayed.
6. Navigate to **Boot Manager**, then select the **EFI Internal Shell** option and press **ENTER**.
7. You will see the EFI Shell prompt now. Enter `MAP FS* -B` to display just the file systems available on your VM one page at a time.
8. Inspect this list of file systems, and choose the one that maps to the VSI OpenVMS V9.2-1 ISO file. Since that ISO has been set up as a CDROM, the file system that maps to it will be labeled as CDROM. As an example, we will assume that the file system we want is `FS0:`.
9. At the Shell> prompt, enter `FS0:\efi\vms\vms_bootmgr`.
10. After this, you should see the VSI Boot Manager screen.

Your virtual machine is now ready to have VSI OpenVMS x86-64 installed on it. See Chapter 3

## 2.3. Creating a VirtualBox Virtual Machine

---

### Note

The following instructions have been written for VirtualBox 7.0.

---

To create a virtual machine in Oracle VM VirtualBox 7, follow these steps:

1. Run Oracle VM VirtualBox and select **Machine > New** from the main menu. The **Create Virtual Machine** wizard opens.
2. On the **Virtual machine Name and Operating System** page of the wizard, do the following:
  - a. Set the **Name** and **Folder** for your VM.
  - b. In the **ISO Image** field, specify the path to your OpenVMS ISO file.
  - c. In the **Type** dropdown, select **Other**.
  - d. In the **Version** dropdown, select **Other/Unknown (64-bit)**.
  - e. Click **Next**.
3. On the **Hardware** page of the wizard, set the **Base Memory** for your virtual machine. VSI recommends a minimum of 8 GB. Click **Next**.
4. On the **Virtual Hard** disk, set the size of your virtual hard disk. VSI recommends a minimum of 15GB. Click **Next**.
5. Click **Finish**.

You have created your VirtualBox virtual machine. Now, you must properly configure it before you can install VSI OpenVMS x86-64 V9.2-1.

## 2.3.1. Completing Your VirtualBox Virtual Machine Configuration

To prepare your virtual machine for VSI OpenVMS x86-64 installation, follow these steps:

1. Once you have created your VM, right-click it and select **Settings** from the menu.
2. In the **Settings** window, do the following:
  - a. Go to **System > Motherboard** and specify the following settings:
    - i. From the **Chipset** dropdown, select **ICH9**. If you select any other chipset, OpenVMS will not install.
    - ii. Make sure the **Enable I/O APIC** and **Enable EFI** options are checked.

---

### Note

Your virtual machine *must* boot from UEFI, not BIOS.

---

- b. Go to **Storage**.

In the Storage Devices area of the Settings window, you will see the default IDE controller and two devices: the hard disk that you created in the [previous topic](#) and the optical drive containing the VSI OpenVMS V9.2-1 ISO file. IDE disk controllers are currently not supported, so you *must* change the controller type to either AHCI (SATA) or LsiLogic (the choice is up to you). To do so, perform the following steps:

- i. Click the IDE controller to select it.
        - ii. In the Attributes area on the right side of the Settings window, select **AHCI** or **LsiLogic** from the **Type** dropdown list.
        - iii. To avoid confusion in the future, enter an appropriate name in the **Name** field.
        - iv. Click the hard disk to display its attributes and make sure that it is now marked appropriately as SATA or LsiLogic.
        - v. Click the optical drive to display its attributes and make sure that it is now marked appropriately as SATA or LsiLogic.
- c. Go to **Network**.
      - i. Click the **Attached to** dropdown and select **Host-only Adapter**.
      - ii. Click **Advanced**.
      - iii. From the **Adapter type** dropdown, select **Intel PRO/1000 MT Server**.
- d. Go to **Serial Ports**. Your VM must have an active serial port, so that you can connect to it later using a terminal emulator.

- i. Check **Enable Serial Port**.
- ii. Set **Port Mode** to **TCP**.
- iii. Uncheck **Connect to existing pipe/socket**.
- iv. In the **Path/Address** field, type the port number that you want to use. In this example, we will use port 2023.
- e. Click **OK** to apply the changes and close the **Settings** window.

Your virtual machine is now ready to have VSI OpenVMS x86-64 installed on it. See Chapter 3.

# Chapter 3. Installing and Upgrading VSI OpenVMS x86-64 V9.2-1 on a Guest Virtual Machine


This chapter provides instructions on booting and installing VSI OpenVMS V9.2-1 on a guest VM, regardless of which hypervisor you are using.

For the first installation of VSI OpenVMS as a guest VM, continue with section Section 3.1. For upgrading an existing VMS installation on a VM, skip to Section 3.2.

## 3.1. Installing VSI OpenVMS x86-64 V9.2-1

Before you install VSI OpenVMS x86-64 V9.2-1 on your virtual machine, ensure it has been created and configured as directed in Chapter 2 of this document. Once you have created and started your VM (or clicked **Begin Installation**, if you are using QEMU/KVM), follow these steps:


1. Depending on your hypervisor of choice and the boot options settings of your VM, you will either see the UEFI Shell> prompt:

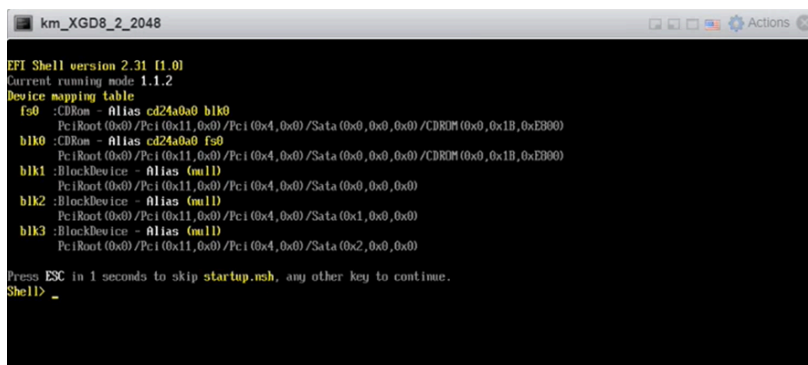

```
km_XGD8_2_2048
UEFI Shell version 2.31 (1.0)
Current running mode: 1.1.2
Device mapping table
fs0 -> CDROM - Alias cd24a0b0 blk0
      PciRoot (0x0)/Pci (0x11, 0x0)/Pci (0x4, 0x0)/Sata (0x0, 0x0, 0x0)/CDROM (0x0, 0x1B, 0xEB90)
blk0 -> CDROM - Alias cd24a0b0 fs0
      PciRoot (0x0)/Pci (0x11, 0x0)/Pci (0x4, 0x0)/Sata (0x0, 0x0, 0x0)/CDROM (0x0, 0x1B, 0xEB90)
blk1 -> BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11, 0x0)/Pci (0x4, 0x0)/Sata (0x0, 0x0, 0x0)
blk2 -> BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11, 0x0)/Pci (0x4, 0x0)/Sata (0x1, 0x0, 0x0)
blk3 -> BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11, 0x0)/Pci (0x4, 0x0)/Sata (0x2, 0x0, 0x0)

Press ESC in 1 seconds to skip startup.nsh, any other key to continue.
Shell> _
```

or the VSI Boot Manager screen:

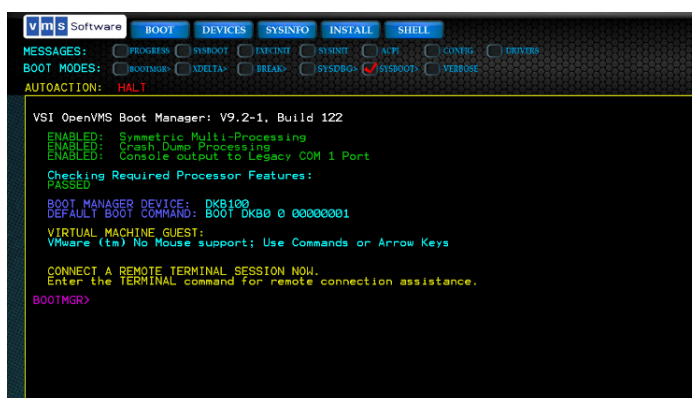

```
VMS Software  BOOT  DEVICES  SYSINFO  INSTALL  SHELL
MESSAGES:  [ ] PROGRESS  [ ] SYSROOT  [ ] TMCINT  [ ] SYSINIT  [ ] ACT  [ ] CONFIG  [ ] DRIVERS
BOOT MODES:  [ ] BOOTMORE  [ ] DELTA*  [ ] BREAK*  [ ] SYSDBG*  [x] SYSBOOT*  [ ] VERBOSE
AUTOACTION:  HALT

VSI OpenVMS Boot Manager: V9.2-1, Build 122
ENABLED: Symmetric Multi-Processing
ENABLED: Crash Dump Processing
ENABLED: Console output to Legacy COM 1 Port
Checking Required Processor Features:
PASSED
BOOT MANAGER DEVICE: DKB100
DEFAULT BOOT COMMAND: BOOT DKB0 0 00000001
VIRTUAL MACHINE GUEST:
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.
Enter the TERMINAL command for remote connection assistance.
BOOTMGR>
```


2. If you see the UEFI Shell> prompt, do the following:

- a. At the Shell> prompt, enter `MAP FS* -B` to display the file systems available on your VM.

- b. Choose the file system that maps to the VSI OpenVMS V9.2-1 ISO file. Since that ISO has been set up as a CDRROM, the file system that maps to it will be labeled as CDRROM as well. As an example, we will assume that the file system we want is FS0:.
- c. At the Shell> prompt, enter `FS0:\efi\vms\vms_bootmgr`

After this, you should see the VSI Boot Manager screen.

3. At the BOOTMGR> prompt, type `DEVICES` to display the list of available disks. Locate the disk that contains the VSI OpenVMS V9.2-1 ISO file. That disk will be labeled as CDRROM or DVD.
4. Enter `BOOT <disk_name>`, where `<disk_name>` is the name of the disk that contains your ISO file (*not* the name of the ISO file itself). As an example, we enter `BOOT DKA100`. After the progress meter reaches 100%, you should see the following screen:

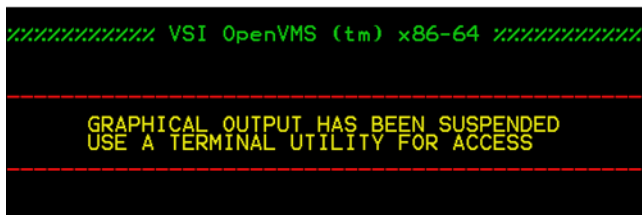

5. Establish a Telnet connection to your VM via a terminal emulator, using the IP address of the host system and the serial port of your VM.

---

## Important

If you are on ESXi, make sure that the port used by your VM can go through the ESXi firewall. If you are having trouble at this stage, contact the ESXi administrator in your company.

If you are on KVM, you must establish an SSH connection by using the `SSH` and `VIRSH` commands. For details, see the official documentation for your Linux distribution.

---

6. Upon connecting, you should see the VSI OpenVMS installation menu and/or the `Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?)` prompt:

---

## Note

If this prompt does not appear, and the output appears blank or unchanging, press `Enter`. After this, the prompt should appear.

---

---

## Important

VSI OpenVMS x86-64 V9.2-1 does not support installation menu items number 3, 5, and 7. Also, do not use item number 6, unless directly instructed otherwise.

---

7. Enter `1` to start the installation process.
  8. Since this a new installation, answer `INITIALIZE` to the `Do you want to INITIALIZE or to PRESERVE?` question.
-



9. At the `Enter device name for target disk:` prompt, enter the name of the disk where you want to install VSI OpenVMS.

To display a list of available devices, enter `?`. You can also enter `??`, which will display a list of devices with their volume label and size. As an example, we will enter `DKA0` :

10. At the `Enter volume label for target system disk` prompt, enter the label that you want to assign to your system disk. In this example, we will enter `systemDisk`.
11. You will see the `Do you want to enable hard links?` question. This choice is up to you and depends on how you are using or plan to use your OpenVMS setup. For more information about hard links, see [VSI OpenVMS System Manager's Manual, Volume 1 \[https://docs.vmssoftware.com/vsi-openvms-system-manager-s-manual-volume-1-essentials/\]](https://docs.vmssoftware.com/vsi-openvms-system-manager-s-manual-volume-1-essentials/).
12. A summary of your choices will be displayed, as well as a prompt asking you to confirm your choice. Enter `YES` if no changes are needed, or `NO` to re-enter the disk label and choice for hard-links. For brevity and readability, similar prompts will not be mentioned again in this document.
13. After the target disk has been initialized and mounted, you will be asked to create the `SYSTEM` password. Set and confirm the password for your `SYSTEM` account. The password must be a minimum of 15 characters.

---

## Warning

If everything is working correctly, you should not see any characters in your output while you enter your password.

If you, however, see any output or get an error at this stage, this could be a terminal emulator issue or a Telnet issue. Make sure that Telnet operates in character mode and that your terminal emulator is forcing the local echo off.

---

14. At the `Enter SCSSNODE:` prompt, enter a unique name for your OpenVMS system. As an example, we will enter `x86`.
15. Next, you will see the `Do you plan to use DECnet?` prompt. DECnet is a family of products that allow OpenVMS systems to communicate with each other (for more information, see [VSI DECnet-Plus for OpenVMS Introduction and User's Guide \[https://docs.vmssoftware.com/vsi-openvms-decnet-plus-introduction-and-user-s-guide/\]](https://docs.vmssoftware.com/vsi-openvms-decnet-plus-introduction-and-user-s-guide/)). This choice is up to you and depends on how you are planning to use your OpenVMS setup.

---

## Note

If you answer `NO`, you will be asked to specify a value for the `SCSSYSTEMID` parameter. This parameter is an ID number that each OpenVMS system has on a network. Make sure that each `SCSSYSTEMID` is unique amongst the systems on your network.

If you answer `YES`, the value for `SCSSYSTEMID` will be calculated based on the DECnet address that you enter when prompted for it.

---

16. Depending on your response to the previous question, you will be prompted for either the DECnet IV address, or the `SCSSYSTEMID` value. Enter a value that is unique in your environment.
17. The next several prompts will ask you to specify the time zone information for your system. Enter appropriate values.

18. After setting the time zone information, you will see the `Do you want to register any Product Authorization Keys?` prompt. VSI recommends that you answer NO and register your Product Authorization Keys (PAKs) after the installation is complete.
- 

## Important

VSI provides PAKs in the form of text files containing DCL code. You *cannot* run that code all at once during VSI OpenVMS installation. If you choose to register your PAKs now, you will need to manually type in each field value when prompted for it. However, after the installation is complete, you will be able to register your PAKs all at once by creating a COM file, copying-and-pasting the code from your PAKs into that COM file (provided, your terminal emulator supports this feature), and then executing it. You must issue the `LICENSE LOAD` command after to make the license(s) active on your system.

---

19. Next, you will see the `Do you want to install DECwindows Motif for OpenVMS X86-64 V1.8?` prompt. DECWindows Motif is a graphical user interface for VSI OpenVMS. The answer is up to you, because it depends on how you plan to use your VSI OpenVMS setup.

20. Next, you will be prompted about installing DECnet products, which allow OpenVMS systems to communicate and share resources with each other.

First, you will see the `Do you want to install DECnet-Plus for OpenVMS X86-64 V9.2-D?` prompt. If you answer NO, you will see the `Do you want to install DECnet Phase IV for OpenVMS X86-64 V9.2-1?` prompt. Note, that you *cannot* install both products. Your choice to install one of them or neither of them depends on how you plan to use your VSI OpenVMS setup.

21. Give an answer to the `Do you always want detailed descriptions?` question. The answer is entirely up to you. As an example, we will say NO.

22. The product kit validation will proceed and then the configuration phase starts. Then, you will see the `Do you want the defaults for all options?` question. If you answer YES (which is recommended), the following components will be installed automatically:

- DECdtm Distributed Transaction Manager
- Support for DECnet-Plus or DECnet (Phase IV) for OpenVMS
- Programming Support:
  - Debugger Utility
  - Image Dump Utility
  - Macro libraries
  - Macro-32 Migration Compiler
  - TLB intermediary form of STARLET
  - C Header Files
  - VMS text libraries of Ada declarations
- RMS Journaling Recovery Utility

- System Programming Support:
  - Delta Debugger
  - System Dump Analyzer Utility
  - Miscellaneous Symbol Table Files
- Utilities:
  - Phone Utility
  - XPG4 Internationalization Utilities
  - World-Wide PostScript Printing Subsystem
- Bliss Require Files
- Example Files
- Message Facility Files (HELP/MESSAGE)
- UETP Files
- DECwindows Server Support:
  - DECwindows Workstation files
  - Video fonts:
    - 100 dots-per-inch video fonts
  - Euro base support
    - Euro 100 dots-per-inch video fonts
- Delete any obsolete OpenVMS files
- Delete files archived by OpenVMS remedial kits

However, if you prefer *not* to install some of these components, answer NO and the system will prompt you about installing each component individually. Note, that in order to not install a subcomponent, you must first choose to install the main component

23. As the configuration phase progresses, some products may require the system to be rebooted. Answer YES to the `Can the system be REBOOTED after the installation completes?` question. A reboot is a necessary part of the installation process. If you answer NO, the installation will be aborted.
24. At this stage, if you previously answered NO to the `Do you want the defaults for all options?` question (see above), you will see additional prompts asking you to confirm or reject the installation of subcomponents of some of the layered products.
25. Once the installation procedure has configured the layered products and their options, you will see the `Do you want to review the options?` prompt. The answer is up to you. As an example, we will answer NO.

26. After the `Portion done`: meter reaches 100%, a list of installed products will be displayed, followed by post-installation information for some of the products. Once the system updates the memory disk (which may take a minute), the installation procedure is complete. You will see the `Press Return to continue...` prompt. Press `Enter`.
27. Next, you will see the VSI OpenVMS installation menu and the `Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?)` prompt. Enter `9` to shut down the system.
28. The system will shut down and display the `**** Hit any key to reboot system ****` prompt. Press any key to reboot the system.
29. Depending on your hypervisor of choice, you will either see the VSI Boot Manager screen, or the UEFI screen. If you see the VSI Boot Manager screen, proceed from [the next step](#).

If you see the `UEFI Shell>` prompt, do the following:

- a. At the `Shell>` prompt, enter `MAP FS*` to display the file systems available on your VM.
- b. Select the file system device of the newly installed system disk.
- c. At the `Shell>` prompt, enter `FS0:\efi\vms\vms_bootmgr`

After this, you should see the VSI Boot Manager screen.

30. At the `BOOTMGR>` prompt, enter `BOOT <system_disk_name>`, where `<system_disk_name>` is the disk that you specified in [this step](#). In this example, we will enter `BOOT DKA0`. The system will boot up, run `AUTOGEN`, then automatically perform a shutdown and reboot. Please take note of, and investigate, any warnings that `AUTOGEN` may display.
31. When you see the `BOOTMGR>` prompt again, enter `BOOT <system_disk_name>` one more time and wait for the system to boot. Press `Enter` when you see an output similar to the one below:

```
Accounting information:
Buffered I/O count:      3087      Peak working set size:    13968
Direct I/O count:      1521      Peak virtual size:       278848
Page faults:           4117      Mounted volumes:         0
Charged CPU time:      0 00:00:01.01  Elapsed time:            0 00:00:04.40
%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 08-00-27-07-FC-DE
```

32. At the `Username:` prompt, type in `system`.
33. At the `Password:` prompt, enter in the password that you have previously set for the `SYSTEM` account (see [this step](#)).
34. You have successfully installed OpenVMS. If you did not register any of your licenses during installation (which is recommended), you must do so now, otherwise you will not be able to use any of the installed products.

To register your PAKs, you can either use the `SYSS$UPDATE:VMSLICENSE.COM` procedure to enter the data for each PAK individually, or you can create a `COM` file, copy the contents of all your PAKs into it, and then execute the file by entering `@ fileName.COM`.

After you have registered your licenses, you must enter the `LICENSE LOAD` command (or reboot your VM) in order to be able to use the installed products.

You have successfully installed OpenVMS and registered your licenses. Now, you must perform several configuration steps, as outlined in Chapter 4.

## 3.2. Upgrading to VSI OpenVMS x86-64 V9.2-1

This section describes how to upgrade from the previous version of OpenVMS to V9.2-1. Before you upgrade make sure your system disk is not part of a shadowed set.

It is *not* possible to upgrade VSI OpenVMS on a shadowed system disk, the procedure will always fail. You will need to disable shadowing on the system disk *before* you can upgrade the operating system.

If you are utilizing a non-shadowed system disk, you can proceed directly to the upgrade procedure Section 3.2.2.

### 3.2.1. Creating a Non-Shadowed Target Disk From a Shadowed Disk

This section describes how to disable shadowing on one of your existing shadowed system disks, so that you can use it as a target disk for the upgrade.

---

#### Caution

VSI strongly recommends that you make a backup copy of the system disk before upgrading it.

---

Perform the steps below:

1. Enter the command `$ @SYS$SYSTEM:SHUTDOWN` to shut down the system booted from the shadowed system disk that you want to upgrade.
2. The system will ask you several questions. Give appropriate answers, but make sure to answer **NO** when the procedure asks whether an automatic reboot should be performed.
3. Now, you will need to perform a conversational (interactive) boot on the system disk that you want to upgrade. Begin the boot by entering the command below at the UEFI Shell prompt. Note that `fsn:` is the device associated with the system disk (such as, for example, `fs1:`):

```
Shell> fsn:\efi\vms\vms_loader.efi -flags 0,1
```

4. At the `SYSBOOT>` prompt, enter the following command to disable volume shadowing on the system disk:

```
SYSBOOT> SET SHADOW_SYS_DISK 0
```
5. At the `SYSBOOT>` prompt, enter `CONTINUE` to resume the boot procedure.
6. After the boot completes, log in to the `SYSTEM` account.
7. Shutdown the system by entering the command `$ @SYS$SYSTEM:SHUTDOWN`
8. When asked whether an automatic system reboot should be performed, answer **NO**.
9. Boot the system from the installation media from which you want to upgrade.

You now have a non-shadowed system disk that you can use for the upgrade. Go to Section 3.2.2 to begin the upgrade procedure.

## 3.2.2. Upgrading a Non-Shadowed System Disk

To upgrade to VSI OpenVMS x86-64 V9.2-1 from VSI OpenVMS x86-64 V9.2, follow these steps:

1. Download, unzip, and copy the VSI OpenVMS x86-64 V9.2-1 ISO file to an area that is locally accessible to your hypervisor.


---

### Note

VSI recommends that you make a backup copy of the system disk before you start the upgrade procedure.

---

2. In your virtual machine management application, select the virtual machine that you want to upgrade to VSI OpenVMS x86-64 V9.2-1 and powered it off. Then, bring up the screen to edit its settings.
3. Find the CDROM/DVD disk controller that your virtual machine is using and change the ISO file associated with the optical drive to the V9.2-1 ISO file.
4. Save the changes and close the settings window.
5. Run your VM. Depending on your hypervisor of choice and the settings of the VM, you will either see the UEFI Shell> prompt:

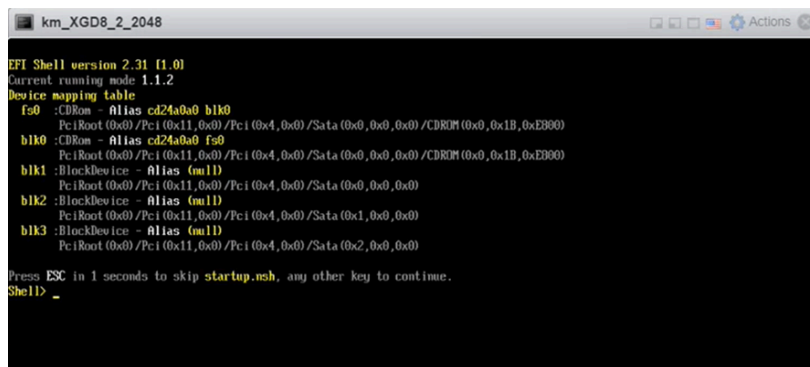


```

km_XGD8_2_2048
EFI Shell version 2.31 (1.0)
Current running mode 1.1.2
Device mapping table
fs0 :CDRom - Alias cd24a0a0 blk0
      PciRoot (0x0)/Pci (0x11,0x0)/Pci (0x4,0x0)/Sata (0x0,0x0,0x0)/CDROM (0x0,0x1B,0xEB90)
blk0 :CDRom - Alias cd24a0a0 fs0
      PciRoot (0x0)/Pci (0x11,0x0)/Pci (0x4,0x0)/Sata (0x0,0x0,0x0)/CDROM (0x0,0x1B,0xEB90)
blk1 :BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11,0x0)/Pci (0x4,0x0)/Sata (0x0,0x0,0x0)
blk2 :BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11,0x0)/Pci (0x4,0x0)/Sata (0x1,0x0,0x0)
blk3 :BlockDevice - Alias (null)
      PciRoot (0x0)/Pci (0x11,0x0)/Pci (0x4,0x0)/Sata (0x2,0x0,0x0)

Press ESC in 1 seconds to skip startup.nsh, any other key to continue.
Shell> _

```

or the VSI Boot Manager screen:



```

VMS Software  BOOT  DEVICES  SYSINFO  INSTALL  SHELL
MESSAGES:   PROGRESS   SYSROOT   EXECINT   SYSINFO   ACPI   CONFIG   DRIVERS
BOOT MODES:   BOOTMGR   DELTA   BREAK   SYSDBG   SYSBOOT   VERBOSE
AUTOACTION:  HALT

VSI OpenVMS Boot Manager: V9.2-1, Build 122
ENABLED: Symmetric Multi-Processing
ENABLED: Crash Dump Processing
ENABLED: Console output to Legacy COM 1 Port
Checking Required Processor Features:
PASSED
BOOT MANAGER DEVICE:  DKB100
DEFAULT BOOT COMMAND:  BOOT DKB0 0 00000001
VIRTUAL MACHINE GUEST:
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.
Enter the TERMINAL command for remote connection assistance.
BOOTMGR>


```

6. If you see the UEFI Shell> prompt, do the following:
  - a. At the Shell> prompt, enter MAP FS\* to display the file systems available on your VM.

- b. Choose the file system that maps to the VSI OpenVMS V9.2-1 ISO file. Since that ISO has been set up as a CDRROM, the file system that maps to it will be labeled as CDRROM as well. As an example, we will assume that the file system we want is FS0:.
- c. At the Shell> prompt, enter `FS0:\efi\vms\vms_bootmgr`

After this, you should see the VSI Boot Manager screen.

7. At the BOOTMGR> prompt, enter `DEVICES` to display the list of available devices.
8. From the list, identify the device that contains the ISO file with the new version of VSI OpenVMS (it will be labelled as a CDRROM) and enter `BOOT <device-name>`. As an example, `BOOT DKA200`. You should see the following screen:

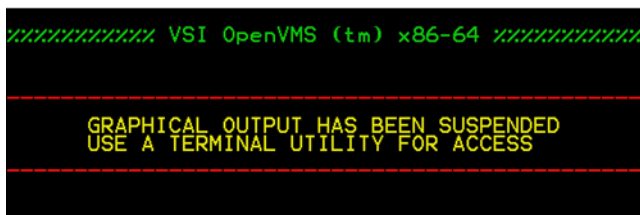

9. Establish a remote connection to your VM via a terminal emulator. There are various methods to establish a remote connection. One of them is to connect using the IP address of the host system and the serial port of your VM. However, if this method does not work for you, you can also use named pipes.

In the serial port setup of your VM guest and in your terminal utility, define your named pipe as `\\. \pipe\pipe_name`, where `pipe_name` is simply a unique name you provide. Using named pipes requires that your terminal utility reside on your VM host system. To use named pipes over a different network node, you will need to use a Named Pipe Proxy server.

When the `BOOTMGR>` prompt appears, your terminal emulator should automatically connect to your VM. However, if that does not happen, you can initiate command output to the serial port manually by entering the command:

```
BOOTMGR> COM n
```

where `n` is the serial port number that your VM uses.

---

## Warning

If you are utilizing VMware Workstation as your hypervisor, be advised that virtual serial port support is not available via the GUI. For more information, refer to the Release Notes.

---

## Note

If you are working on KVM and need to manage your virtual machines via SSH, start by entering the `SSH` to establish a secure connection to the host. Once connected, execute the `VIRSH` command. For details, see the official documentation for your Linux distribution.

---

10. Upon connecting, you should see the `Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?)` prompt.

## Note

If this prompt does not appear, and the output appears blank or unchanging, press Enter. After this, the prompt should appear.

---

### 11. Important

When upgrading to VSI OpenVMS V9.2-1, the installation *will be aborted* if the VSI x86VMS OpenSSH V8.9-\* product is currently installed on your system. If you encounter an error message during the uninstallation procedure, such as:

```
OpenVMS OpenSSH product cannot be removed from this node as OpenSSH root
logical definition file, SSH$DEFINE_ROOT.COM is missing in directory
SYS$STARTUP
```

it indicates that OpenSSH was not configured after the last OS installation. To avoid this error, you must configure OpenSSH *before* attempting to remove it. This involves running the following two commands:

```
$ @sys$common:[openssh.bin]ssh$create_account.com
$ @sys$common:[openssh.bin]ssh$create_startup_file.com
```

If VSI x86VMS OpenSSH V8.9-\* is not currently installed on your system, skip this step.

---

To uninstall VSI x86VMS OpenSSH V8.9-\*, perform the following procedure:

- a. In the VSI OpenVMS installation menu, enter 6 - Removed Installed Products.
- b. Accept the default answers for the target disk prompt and the detailed descriptions prompt.
- c. You will see a list of installed products. Enter the item number that represents the VSI x86VMS OpenSSH V8.9-\* product.
- d. Answer YES to the Do you want to continue? question.
- e. **Important:** Answer NO to *each* of the Do you want to terminate? questions.
- f. When the product is removed, you will see the Press Return to continue... prompt. Press Enter.
- g. You will see the VSI OpenVMS installation menu.

12. Enter 1 to start the upgrade procedure.

13. Since this is an upgrade and not a fresh installation, answer PRESERVE to the Do you want to INITIALIZE or to PRESERVE? question.

14. At the Enter device name for target disk: prompt, enter the name of the disk where your current version of VSI OpenVMS is installed. If you are not sure which disk that is, enter ?? to display a list of the disks with volume names.

15. You will see a message stating the current label of the selected disk. Specify whether you want to keep the label or change it.

---



16. If your system does not have any patches installed that have recovery data available, skip to the next step.

If your system does have at least one such patch installed, you will see an output informing you of which patches have recovery data available. Then, you will see the `Do you want to continue?` prompt. Answer `YES`.

17. At this stage, the system will output a list of installed products and state how each of the products is going to be handled by the upgrade procedure.

If DECnet-Plus is not installed on your system, you will see a prompt to install it. The answer is up to you. Note that if you have DECnet IV installed and choose to install DECnet Plus, DECnet IV will be removed.

18. The upgrade process will list how the currently installed products will be handled. If DECnet Plus is not installed on your system, a prompt to install it will be displayed. Answer accordingly. If you have DECnet IV installed and choose to install DECnet Plus, then DECnet IV will be removed.

19. Give an answer to the `Do you always want detailed descriptions?` question. In this example, we will answer `NO`.

20. The product kit validation will proceed and then the configuration phase starts. You will then see the `Do you want the defaults for all options?` question. If you answer `YES` (which is recommended), the following components will be installed automatically:

- DECdtm Distributed Transaction Manager
- Support for DECnet-Plus or DECnet (Phase IV) for OpenVMS
- Programming Support:
  - Debugger Utility
  - Image Dump Utility
  - Macro libraries
  - Macro-32 Migration Compiler
  - TLB intermediary form of STARLET
  - C Header Files
  - VMS text libraries of Ada declarations
- RMS Journaling Recovery Utility
- System Programming Support:
  - Delta Debugger
  - System Dump Analyzer Utility
  - Miscellaneous Symbol Table Files

- 
- Utilities:

- Phone Utility
- XPG4 Internationalization Utilities
- World-Wide PostScript Printing Subsystem
- Bliss Require Files
- Example Files
- Message Facility Files (HELP/MESSAGE)
- UETP Files
- DECwindows Server Support:
  - DECwindows Workstation files
  - Video fonts:
    - 100 dots-per-inch video fonts
    - Euro base support
      - Euro 100 dots-per-inch video fonts
- Delete any obsolete OpenVMS files
- Delete files archived by OpenVMS remedial kits

However, if you prefer *not* to install some of these components, answer NO and the system will prompt you about installing each component individually. Note, that in order to not install a subcomponent, you must first choose to install the main component

---

## Note

Depending on what other components are currently installed or not installed on your system, you might get additional prompts asking for your consent to install them.

---

21. As the configuration phase progresses, some of the products may require the system to be rebooted. If you see the `Can the system be REBOOTED after the installation completes?` question, always answer YES, because answering NO will abort the upgrade.
  22. As the configuration phase progresses, some of the products may require the system to be rebooted. If you see the `Can the system be REBOOTED after the installation completes?` question, always answer YES, because answering NO will abort the upgrade.
  23. Once the upgrade procedure has configured the layered products and their options, you will see the `Do you want to review the options?` prompt. The answer is entirely up to you. As an example, we will answer NO.
  24. As the execution phase progresses, you will see several PCSI messages along with the `Do you want to continue?` prompt for one or more of the products that will be installed. Answer YES to all such prompts.
-

25. After the `Portion done` meter reaches 100%, you will see the list of installed and uninstalled products followed by post-installation information for some of them. Once the system updates the memory disk (which may take a minute), the upgrade procedure is complete. You will see the `Press Return to continue...` prompt. Press `Enter`.
26. You will see the VSI OpenVMS installation menu and the `Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?)` prompt. Enter 9 to shut down the system.
27. At the `BOOTMGR>` prompt, enter `BOOT <your_system_disk>`, where `<your_system_disk>` is the disk where you have installed VSI OpenVMS x86-64 V9.2-1. In this example, we will enter `BOOT DKA0`. The system will startup and reboot again.
28. Again, depending on your hypervisor of choice, you may have to return to the hypervisor host and bring up the graphical console screen for your VM to interact with the Shell and/or Boot Manager. Once the Boot Manager lists all your known bootable devices, type `BOOT <your_system_disk>` again.
29. Log in to the system.
30. Now, you must register your licenses. To do so, you can either use the `SYS $UPDATE:VMSLICENSE.COM` procedure to enter the data for each license individually, or you can create a `COM` file, copy all of your license scripts into it, and then execute the file by entering `@ fileName.COM`. After you have registered your licenses, you must enter the `LICENSE LOAD` command or reboot your VM.

You have successfully upgraded to VSI OpenVMS x86-64 V9.2-1.



# Chapter 4. Networking Options

This chapter provides information about networking options and instructions for configuring DECnet Phase IV, VSI TCP/IP Services, and VSI OpenSSH on OpenVMS x86-64 V9.2-1.

## 4.1. Setting Up DECnet Phase IV

If you chose to install DECnet Phase IV, you must to configure this software using the NETCONFIG command procedure. For more information, see the [DECnet for OpenVMS Guide to Networking](https://docs.vmssoftware.com/vsi-openvms-decnet-guide-to-networking/) [<https://docs.vmssoftware.com/vsi-openvms-decnet-guide-to-networking/>].

Once you have configured DECnet Phase IV, edit `SYS$COMMON:[SYSMGR]SYSTARTUP_VMS.COM` so that the software starts when the system reboots. You can have the software start interactively or in batch mode by making one of the following changes:

- Locate and uncomment the line:

```
#!$ START/NETWORK DECNET
```

So it now appears as:

```
$ START/NETWORK DECNET
```

- To start the network in a batch job (speeds up startup) locate and uncomment the line:

```
#!$ SUBMIT SYS$MANAGER:STARTNET.COM
```

So it now appears as:

```
$ SUBMIT SYS$MANAGER:STARTNET.COM
```

For more DECnet Phase IV documentation, visit [VSI Documentation Portal](https://docs.vmssoftware.com) [<https://docs.vmssoftware.com>].

## 4.2. Configuring VSI TCP/IP Services

This section provides information on configuring VSI TCP/IP Services X6.0-20 with a dynamic IP address provided by a DHCP server.

---

### Important

The procedure below assumes you already have a network with a running DHCP server. It also assumes that your virtual machine is running and you have established a connection to the machine via a terminal emulator.

---

Follow these steps:

1. At the \$ prompt, enter `@tcpip$config`
2. Select 1 - Core environment.
3. Select 1 - Domain

4. Select 2 - Interfaces
5. Select 1 - IE0 Menu (EIA0: TwistedPair 1000mbps)
6. Select 1 - Add a primary address on IE0
7. Select 1- Enter configuration option:  
  
\*Is this address used by Clusters over IP (IPCI) [NO]:  
  
IPv4 Address may be entered with CIDR bits suffix.
8. Enter IPv4 Address []:
9. Enter hostname []:
10. Exit the configuration menu.
11. **Optional:** To make sure everything works correctly so far, ping the IP address that you specified earlier. Do not close your PuTTY window.

## 4.3. Configuring VSI OpenSSH

To configure VSI OpenSSH on your VSI OpenVMS system, follow these steps:

---

### Important

The procedure below assumes that your virtual machine is running and you have established a connection to the machine via a terminal emulator.

---

Follow these steps:

1. At the \$ prompt, enter `reboot` to reboot your virtual machine.
2. Enter `BOOT <your_system_disk_name>` and re-login to the system.
3. At the \$ prompt, enter `@tcpip$config`
4. Select 6 - Startup VSI TCP/IP Services for OpenVMS.
5. Exit the configuration menu.
6. At the \$ prompt, enter:  
  
`$ @sys$common:[opnssh.bin]ssh$create_account.com`
7. Give the default answer to the Enter default UIC group number for OpenSSH account prompt.
8. Enter the following commands in this order:  
  
`$ @sys$common:[opnssh.bin]ssh$create_startup_file.com`  
`$ @sys$common:[opnssh.bin]ssh$generate_keys.com`  
`$ @sys$common:[opnssh.bin]ssh$install_info.com`

---

## Note

After entering the second command, make sure that SSH keys were generated. They will be displayed on the screen.

---

9. Close the current PuTTY session.
10. Establish a **Telnet** connection to the system via the IP address that was assigned to your system by DHCP.
11. Login to the system.
12. **Optional:** Since later steps will involve editing existing VMS files, we recommend entering the following commands to set the page length and page width according to the size of your terminal window and turn off overstrike mode:

```
$ set terminal/inquire
$ set terminal/insert
```

13. Type in `EDIT SYSTARTUP_VMS.COM`

14. In the file, find and uncomment the following line:

```
@SYS$STARTUP:TCPIP$STARTUP.COM
```

15. Scroll to the end of the file and insert the following lines before `$ EXIT:`

```
$ @sys$common:[openssh.bin]SSH$STARTUP.COM
$ @sys$sysdevice:[vms$common.openssh.bin]SSH$DEFINE_COMMANDS
```

16. Press **Ctrl+Z** to save the changes and close the file.

17. Enter `EDIT SYLOGICALS.COM`

18. In the file, find and uncomment this block of lines:

```

$! DEFINE/SYSTEM/EXECUTIVE SYSUAF                SYS$SYSTEM:SYSUAF.DAT
$! DEFINE/SYSTEM/EXECUTIVE SYSUAFALT            SYS$SYSTEM:SYSUAFALT.DAT
$! DEFINE/SYSTEM/EXECUTIVE SYSALF              SYS$SYSTEM:SYSALF.DAT
$! DEFINE/SYSTEM/EXECUTIVE RIGHTSLIST          SYS$SYSTEM:RIGHTSLIST.DAT
$! DEFINE/SYSTEM/EXECUTIVE NETPROXY            SYS$SYSTEM:NETPROXY.DAT
$! DEFINE/SYSTEM/EXECUTIVE NET$PROXY           SYS$SYSTEM:NET$PROXY.DAT
$! DEFINE/SYSTEM/EXECUTIVE NETOBJECT           SYS$SYSTEM:NETOBJECT.DAT
$! DEFINE/SYSTEM/EXECUTIVE NETNODE_REMOTE      SYS$SYSTEM:NETNODE_REMOT`
$! DEFINE/SYSTEM/EXECUTIVE LMF$LICENSE         SYS$SYSTEM:LMF$LICENSE.L`
$! DEFINE/SYSTEM/EXECUTIVE VMSMAIL_PROFILE     SYS$SYSTEM:VMSMAIL_PROFI`
$! DEFINE/SYSTEM/EXECUTIVE VMS$OBJECTS         SYS$SYSTEM:VMS$OBJECTS.D`
$! DEFINE/SYSTEM/EXECUTIVE VMS$AUDIT_SERVER    SYS$MANAGER:VMS$AUDIT_SE`
$! DEFINE/SYSTEM/EXECUTIVE VMS$PASSWORD_HISTORY SYS$SYSTEM:VMS$PASSWORD_`
$! DEFINE/SYSTEM/EXECUTIVE VMS$PASSWORD_DICTIONARY SYS$LIBRARY:VMS$PASSWORD_`
$! DEFINE/SYSTEM/EXECUTIVE NETNODE_UPDATE      SYS$MANAGER:NETNODE_UPDA`
$! DEFINE/SYSTEM/EXECUTIVE VMS$PASSWORD_POLICY SYS$LIBRARY:VMS$PASSWORD_`
$! DEFINE/SYSTEM/EXECUTIVE LAN$NODE_DATABASE   SYS$SYSTEM:LAN$NODE_DATA`
$! DEFINE/SYSTEM/EXECUTIVE VMS$CLASS_SCHEDULE  SYS$SYSTEM:VMS$CLASS_SCH`

```

19. Save and close the file.

20. Reboot the system.

21. **Optional:** To verify that everything has been set up correctly, try and establish an SSH connection to your virtual machine.



# Appendix A. Setting up a VMS Cluster

This appendix provides instructions to create a VMS cluster with two Oracle VirtualBox VMs both running on a Windows 10 system host with each using its own system disk.

---

## Note

VSI development is providing the information in this appendix as one example of how to set up a cluster on a virtual machine. There may be other or better ways to do this. VSI encourages our customers to find other methods and to share them with us.

---

Use the following worksheet to list the names and addresses for your specific cluster environment. Variables in monospace font are used throughout the instructions.

Item	Your specific environment name
Location of the VSI OpenVMS V9.2-1 ISO file	_____
Your node names	
<VM1_nodename>	_____
<VM2_nodename>	_____
Names for your virtual machines	
<VM1_name>	_____
<VM2_name>	_____
Names for your system and paging disks	
<VM1_sysdisk_name>	_____
<VM1_paging_disk_name>	_____
<VM2_sysdisk_name>	_____
<VM2_paging_disk_name>	_____
DECnet addresses of your virtual machines	
<VM1_DECnet_address>	_____
<VM2_DECnet_address>	_____
SCSSYSTEMID	
<VM1_SCSSYSTEMID>	_____
<VM2_SCSSYSTEMID>	_____
MAC addresses <sup>1</sup>	
<VM1_DECnet_mac_address>	_____
<VM2_DECnet_mac_address>	_____
TCP/IP addresses for your virtual machines	
<your_domain_name>	_____
<VM1_TCPIP_address_1>	_____
<VM1_TCPIP_address_2>	_____
<VM2_TCPIP_address_1>	_____
<VM2_TCPIP_address_2>	_____

---

Item	Your specific environment name
Port numbers <sup>2</sup>	
<VM1_port_number_1>	_____
<VM1_port_number_2>	_____
<VM2_port_number_1>	_____
<VM2_port_number_2>	_____
Number and password for the cluster	
<cluster_number>	_____
<cluster_password>	_____

<sup>1</sup>The pseudo-MAC address used by DECnet comprises the fixed hex digits AA-00-04-00 followed by nn-nn that is the DECnet address in big-endian format. For example, 01-28 -> 0x2801 -> 10241 (also SCSSYSTEMID) -> (1024 \* 10) + 1 -> DECnet address 10.1.

<sup>2</sup>In this article, we are using PuTTY as terminal emulator and have ports <VM1\_name> COM1, <VM1\_name> COM2, <VM2\_name> COM1, <VM2\_name> COM2, all using Host name 127.0.0.1, Connection Type: Raw, and ports <VM1\_port\_number\_1>, <VM1\_port\_number\_2>, <VM2\_port\_number\_1>, and <VM2\_port\_number\_2> respectively.

## A.1. Initial Preparation

Follow these steps:

1. Locate the V9.2-1 ISO file. You may have a zipped copy, which you should unzip.
2. On an existing OpenVMS system, enter these commands to create a 2GB disk file that can be replicated as needed for each of the disks required:

```
$ LD CREATE EMPTY2GBDISK.DSK/SIZE=4194304/ERASE
$ LD CONNECT EMPTY2GBDISK.DSK LDA EMPTY$
$ INITIALIZE EMPTY$ EMPTY2GBDISK
$ LD DISCONNECT EMPTY$
$ ZIP EMPTY2GBDISK EMPTY2GBDISK.DSK
```

3. Copy the resulting EMPTY2GBDISK.ZIP file to your host system.
4. Unzip this archive four times to a folder where VirtualBox can access the DSK files. After each Unzip, rename the resulting EMPTY2GBDISK.DSK to:

- <VM1\_sysdisk\_name>.DSK
- <VM1\_paging\_disk\_name>.DSK
- <VM2\_sysdisk\_name>.DSK
- <VM2\_paging\_disk\_name>.DSK

5. Make a VMDK file for each one using the following command:

```
vboxmanage internalcommands createrawvmdk -filename <x>.vmdk -rawdisk <x>.dsk
```

## A.2. Creating the First Virtual Machine

Follow these steps:

1. In the Oracle VM VirtualBox Manager window, click Machine, then New.
2. In the Name field, enter <VM1\_name>. Accept the default for the Machine Folder field, set Type to Other, and Version to Other/Unknown (64-bit).

3. Click Next. VSI recommends that you set the memory size to 6144MB, then click Next again.
4. Select “Do not add a virtual hard disk”, then click Create and Continue from the warning.
5. Select Settings for the new VM and click System.
6. In the Motherboard tab, uncheck Floppy and Optical, choose Chipset ICH9, and check Enable EFI.
7. In the Processor tab, VSI recommends that you set the CPU count to at least 2.
8. Select Storage from the settings menu.
9. Click Add controller, select the AHCI (SATA) type controller. Add four disks to this controller in the following order:
  - `<VM1_sysdisk_name>.VMDK` (as a hard disk)
  - `<VM1_paging_disk_name>.VMDK` (as a hard disk)
  - `<V9.2-1_ISO_file>.ISO` (as an optical drive)
  - `<VM2_sysdisk_name>.VMDK` (as a hard disk)

You must add each disk to the available drives first, and then select it for the VM.

10. From the Settings menu, select Network.
11. Enable the first three adapters. The first adapter is used to connect to your extended network using TCP/IP, and might include a VPN. The second adapter is used to connect to your local network (which may be entirely within your host system) using TCP/IP. The third adapter is used to connect your virtual machines using DECnet IV. All three adapters are used for cluster communication.
12. For Adapter 1, select the NAT adapter type (default value).

---

## Note

This setting is determined by how your computer accesses the rest of your network from the VM. In the example described here, the target machines are connected via VPN, which requires the NAT adapter type. If you are using a local network, change the adapter type to Bridged.

---

Under Advanced, make sure Adapter Type is set to Intel PRO/1000 MT Desktop (82540EM), use default MAC address, and make sure Cable Connected is checked.

13. Adapter 2 is a Bridged Adapter; accept the default name.

Under Advanced, specify the same settings as Adapter 1 with the default MAC address, but make sure Promiscuous is set to Deny.
14. Set up Adapter 3 the same way as Adapter 2 but override the MAC address with `<VM1_DECnet_mac_address>`. This MAC address matches the DECnet address `<VM1_DECnet_address>`.
15. From the Settings menu, select Ports. With our method, two ports with distinct port numbers are used on each system. Ports 1 and 2 are COM1 and COM2 respectively. The Port Mode is

TCP. “Connect to existing pipe/socket” option should be unchecked, and Path/Address are set to <VM1\_port\_number\_1> and <VM1\_port\_number\_2>.

## A.3. Starting the Virtual Machine

Follow these steps:

1. Start the VM that you have just set up.
2. In the Virtual Machine console window that is created, the VM boot process should stop at the Shell> prompt. If it does not, press ESC.
3. Click View, then click Scaled Mode. Close the Virtual Machine window.
4. In the Close Virtual Machine pop-up window, select Power Off the machine, and then click OK. This sets “Power off” as the default action on close.
5. Restart the VM.
6. Connect your COM1 port.
7. To find the CD-ROM and invoke the Boot Manager from it, enter the map -r command at the Shell> prompt. Because the only bootable disk is the ISO kit file, just VMS\_BOOTMGR should be sufficient.

Enable auto-boot and set Flags to 800 before entering the BOOT DKA200 command to begin the installation. You should install to the DKA0: disk with the following settings:

1. Set the volume label to <VM1\_nodename>\_V92
2. Enable hard links if you need them
3. Set SCSNODE to <VM1\_nodename>
4. Set SCSSYSTEMID to <VM1\_SCSSYSTEMID>
8. **Important:** When the system reboots to perform AUTOGEN, abort AUTO BOOT and manually boot the new system disk with the command BOOT DKA0. Once the AUTOGEN step is done and the system boots, log in and invoke CLUSTER\_CONFIG\_LAN.COM, option 1.
9. Answer Yes to the SCSI bus prompt and enter <cluster\_number> and <cluster\_password> when requested.
10. Answer Yes to the disk server prompt.
11. Answer No to the quorum disk prompt. Skip the port allocation class and set EXPECTED\_VOTES to 1. You can safely ignore the warnings.
12. Run AUTOGEN again and let the system reboot as a single-node cluster.
13. At this point, you should modify several of the SYSGEN parameters. Refer to the *VSI OpenVMS System Management Utilities Reference Manual* for the description of MODPARAMS.DAT and update its contents and the CURRENT parameter settings. The values used should be from the following list:

```

WINDOW_SYSTEM=1
DISK_QUORUM=""
NISCS_LOAD_PEA0=1
VAXCLUSTER=2
EXPECTED_VOTES=1
MSCP_LOAD=1
MSCP_SERVE_ALL=5
INTERCONNECT="NI"
BOOTNODE="NO"
TTY_TYPAHDSZ=512
TTY_BUF=132
SCSNODE="<VM1_nodename>"
SCSSYSTEMID=<VM1_SCSSYSTEMID>
VOTES=1

```

## A.4. Adding a Node Using a Copy of an Existing System Disk

On VSI OpenVMS x86-64 systems, if you use a copy of an existing system disk as the initial system disk of a new node that is being added to a cluster, you must perform an additional step, which is changing the label for the memory disk. Follow these steps (which assume that the new system disk is DKA300:, and it is not already mounted):

1. Identify a system disk for VM2, *<VM2\_sysdisk\_name>*.
2. To copy DKA0: (system disk of VM1) to DKA300: (this will become system disk of VM2), type in the following commands:

```

$ MOUNT/FOREIGN DKA300:
$ BACKUP/IMAGE/IGNORE=INTERLOCK DKA0: DKA300:

```

3. To be able to change the label of DKA300:, first type in the following commands:

```

$ DISMOUNT DKA300:
$ MOUNT DKA300/OVERRIDE=ID

```

4. Change the label to *<VM2\_nodename>\_V92*.

5. Dismount the disk again and enter:

```

$ MOUNT/SYSTEM DKA300: <VM2_nodename>_V92

```

6. Connect and mount the memory disk container file using the following commands:

```

$ LD CONNECT DKA300:[VMS$COMMON.SYS$LDR]SYS$MD.DSK LDM LDDEV
$ MOUNT/OVER=ID LDDEV

```

7. Note the label of the memory disk. It will be of the form "MD20345927FD". Change the last letter to create a unique name. For example:

```

$ SET VOLUME LDDEV /LABEL=MD20345927FE

```

8. This gets a unique volume label into *<VM2\_sysdisk\_name>*'s memory disk. Before dismounting the memory disk or the system disk, update several parameters, including SCSNODE and SCSSYSTEMID:

```

$ MCR SYSGEN
SYSGEN> USE LDDEV:[SYS0.SYSEXEXE]X86_64VMSSYS.PAR
SYSGEN> SET SCSNODE "<VM2_nodename>"
SYSGEN> SET SCSSYSTEMID <VM2_SCSSYSTEMID>
SYSGEN> SET VOTES 0
SYSGEN> WRITE LDDEV:[SYS0.SYSEXEXE]X86_64VMSSYS.PAR
SYSGEN> EXIT

```

9. Dismount the memory disk before completing the other setup tasks for the new system disk.

```
$ DISMOUNT LDDEV
$ LD DISCONNECT LDDEV
```

## A.5. Creating the Second Virtual Machine

1. Before you start, shut down and power off the VM you are currently running (VM1).
2. Go into VM1 Settings, click Storage and remove disk `<VM2_sysdisk_name>` (you will need to use that disk in the new VM).
3. The process of creating VM2 is mostly the same as VM1 (as described in Section A.2), with a few differences:
  - VM's name is `<VM2_name>`.
  - Add three disks to its SATA controller: `<VM2_sysdisk_name>.VMDK` and `<VM2_paging_disk_name>.VMDK` (as hard disks), and an empty optical drive.
  - Under Network, set the MAC address for Adapter 3 to `<VM2_DECnet_MAC_address>`, which translates to DECnet address `<VM2_DECnet_address>` or SCSSYSTEMID `<VM2_SCSSYSTEMID>`. (See earlier footnote).
  - Under Ports, use port numbers `<VM2_port_number_1>` and `<VM2_port_number_2>`.
4. Start VM1 again. Allow it to boot completely.
5. Start VM2 and perform steps 2 through 4 from Section A.3 of this document, so that the default action on Close is Power Off instead of Save.
6. Restart VM2 and connect VM2's COM1 port.
7. Locate and start the boot manager as for VM1. Enable auto-boot and set Flags to 800.
8. Then boot DKA0:.

At this point, you should have a two-node cluster, running off separate system disks.

## A.6. Finalizing Cluster Setup

Perform the following system management tasks as follows:

1. Initialize and mount the paging disk on each system, then create PAGEFILE.SYS and SYSDUMP.DMP in [SYS0.SYSEXE] for each one.
2. Use 1,000,000 blocks for each file. Also, create a [SYSMGR] directory on this disk as a place to save dumps from SDA.

On VM1, enter the following:

```
$ INITIALIZE DKA100: <VM1_nodename>_PAGE
$ MOUNT/SYSTEM DKA100: <VM1_nodename>_PAGE
$ CREATE/DIRECTORY DKA100:[SYS0.SYSEXE]
$ MCR SYSGEN
SYSGEN> CREATE DKA100:[SYS0.SYSEXE]PAGEFILE.SYS/SIZE=1000000
SYSGEN> CREATE DKA100:[SYS0.SYSEXE]SYSDUMP.DMP/SIZE=1000000
SYSGEN> EXIT
```

```
$ CREATE/DIRECTORY DKA100:[SYSMGR]
```

Repeat these commands on VM2 using `<VM2_nodename>_PAGE`.

3. Edit SYPAGSWPFILES.COM to install the page file.

On VM1, type in:

```
$ mount/system dka100: <VM1_nodename>_page
$ mcr sysgen install dka100:[sys0.sysexec]pagefile.sys/page
```

On VM2, type in:

```
$ mount/system dka100: <VM2_nodename>_page
$ mcr sysgen install dka100:[sys0.sysexec]pagefile.sys/page
```

4. During the installation of OpenVMS, a minimal pagefile was created on the system disk. Use the SHOW MEMORY command to confirm the exact location. You may want to delete this (which is now on both system disks), and you should do this by renaming the file (to PAGEFILE.TMP, for example), then rebooting each system before deleting the renamed file.
5. To set up the dump device, enter the following command on both systems:

```
$ SET DUMP_OPTIONS/DEVICE=DKA100:
```

6. Update MODPARAMS.DAT on each node for the changes that have been made. The following lists are taken from the MODPARAMS contents generated by the installation and running CLUSTER\_CONFIG\_LAN.COM:

Common to both nodes	VM1 only	VM2 only
WINDOW_SYSTEM=1	SCSNODE="<VM1_nodename>"	SCSNODE="<VM2_nodename>"
DISK_QUORUM=""	SCSSYSTEMID=	SCSSYSTEMID=
NISCS_LOAD_PEA0=1	<VM1_SCSSYSTEMID>	<VM2_SCSSYSTEMID>
VAXCLUSTER=2	VOTES=1	VOTES=0
EXPECTED_VOTES=1		
MSCP_LOAD=1		
MSCP_SERVE_ALL=5		
INTERCONNECT="NI"		
BOOTNODE="NO"		
TTY_TYPAHDSZ=512		
TTY_BUF=132		

## Note

Some of these values may not have been set to the desired values (probably MSCP\_SERVE\_ALL, TTY\_TYPAHDSIZ, and TTY\_BUF). You need to edit both copies of MODPARAMS.DAT and use SYSGEN to update the values in use. Do not forget to enter WRITE CURRENT.

7. To set the terminal (and any other) features you want, create a SYLOGIN.COM and/or LOGIN.COM. Among other things, we use:

```
$ SET TERMINAL/WIDTH=132/PAGE=48/INSERT/INQUIRE
```

The values above match the PuTTY setup of the terminal window used in these instructions.

8. Set up TCP/IP Services and enter the command @TCPIP\$CONFIG.COM:

- Set Domain to `<your_domain_name>`
- Set IE0 to `<VM1_TCPIP_address_1>/24 = <VM1_nodename>` and `<VM2_TCPIP_address_1>/24 = <VM2_nodename>` (mask = 255.255.255.0). VirtualBox works with 10.0.2.15 and similar addresses.
- Set IE1 to static addresses that work with your local host's network, so you can issue a TELNET command to each node from your local host (but leave the node name associated with IE0). These are `<VM1_TCPIP_address_2>` and `<VM2_TCPIP_address_2>`.
- Set IE2 to "No TCP/IP", this adapter is for DECnet.
- Set Default route to an appropriate gateway value. VirtualBox works with 10.0.2.2.
- Set DNS to your extended network's name servers' addresses.
- Make sure FTP and TELNET are both set as CLIENT and SERVER.

9. Set up DECnet IV using NETCONFIG.COM and start it with STARTNET.COM:

- Set `<VM1_nodename> = <VM1_DECnet_address>` and `<VM2_nodename> = <VM2_DECnet_address>`
- Define LINE and CIRCUIT EIA-2 only (STATE ON)
- Define the other node in the NODE database.

On VM1, enter:

```
$ MCR NCP DEFINE NODE <VM2_DECnet_address> NAME <VM2_nodename>
```

On VM2, enter:

```
$ MCR NCP DEFINE NODE <VM1_DECnet_address> NAME <VM1_nodename>
```

At this point, we have a two-node cluster, with each node running from its own system disk. Each node has a private page/dump disk. The first node (VM1) also has the kit ISO as a third disk (optical drive). For symmetry, the second node (VM2) also has an empty optical drive. For safety, only VM1 has a cluster vote.

## A.7. Saving Your Cluster Setup

At this point, it's worth saving all the work that's been done so far. The following method is the easiest way to save the current VMS cluster setup (however, note that it does not save any of the VirtualBox VM configuration data).

Shut down and power off both nodes. Then create a ZIP file of the four DSK files:

- `<VM1_sysdisk_name>.DSK`



- <VM1\_paging\_disk\_name>.DSK
- <VM2\_sysdisk\_name>.DSK
- <VM2\_paging\_disk\_name>.DSK

Perform the following steps:

1. Use the CLUSTER\_SHUTDOWN and POWER\_OFF options in SHUTDOWN.COM. Once the virtual machines have exited, use the host to create the ZIP file.
2. On Windows 10, open your “VirtualBox VMs” folder, select all four files, and right-click the selection.
3. In “Send to”, choose “Compressed (Zipped) folder”.
4. The ZIP file is named after one of the files, so when the ZIP file is populated, rename it.

---

### **Note**

If you need to restore just one disk from here, that does not mean you have to restore all of them. Simply navigate to the ZIP folder and drag the disk file you need back to the original folder to overwrite it.

---



# Appendix B. Sample Installation and Upgrade Logs

This appendix provides a sample installation log for VSI OpenVMS x86-64 V9.2-1 installation.

---

## Note

Depending on the choices that you make during the installation as well as your hypervisor of choice, certain parts of your log might look different.

---

## B.1. Sample Installation Log

Below is the sample installation log.

```
VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing
ENABLED: Crash Dump Processing
ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:
PASSED

BOOT MANAGER DEVICE: DKB0
DEFAULT BOOT COMMAND: BOOT DKB0 0 00000001

VIRTUAL MACHINE GUEST:
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.
Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

   DKB0           (DVD) = FS2      UEFI: E9_2_1      VMS: None          1574 MB  SATA DVD

BOOTMGR> BOOT DKB0:
Booting...
%VMS_BOOTMGR-I-INSTALL, Booting an OpenVMS Installation Kit...
100%

%%%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%%%

GRAPHICAL OUTPUT HAS BEEN SUSPENDED
USE A TERMINAL UTILITY FOR ACCESS

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

%SYSBOOT-I-VMTYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

VMS Software, Inc. OpenVMS (TM) x86_64 Operating System, V9.2-1
Copyright 2023 VMS Software, Inc.
```

## Appendix B. Sample Installation and Upgrade Logs

---

MDS Mitigation active, variant verw(MD\_CLEAR)

%SMP-I-CPUTRN, CPU #3 has joined the active set.  
%SMP-I-CPUTRN, CPU #2 has joined the active set.  
%SMP-I-CPUTRN, CPU #1 has joined the active set.

Installing required known files...

Configuring devices...

%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system or you can install or upgrade layered products that are included on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform "standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/? ) 1

\*\*\*\*\*

This procedure will ask a series of questions.

() - encloses acceptable answers  
[] - encloses default answers

Type your response and press the <Return> key. Type:

? - to repeat an explanation  
^ - to change prior input (not always possible)  
Ctrl/Y - to exit the installation procedure

This procedure installs the OpenVMS X86-64 operating system.

All software and data files that were previously on the target disk will be removed.

Do you want to INITIALIZE or to PRESERVE? [PRESERVE] init

You must enter the device name for the target disk on which OpenVMS X86-64 will be installed.

Enter device name for target disk: (? for choices) ??

Device Name	Device Type Name	Volume Label	Size (blocks/xB)
DKB100:	ATA VMware Virtual S	16777216	8.00GB
DKD0:	VMware Virtual disk	4194304	2.00GB

## Appendix B. Sample Installation and Upgrade Logs

---

Enter device name for target disk: (? for choices) dkb100:

Enter volume label for target system disk: [X86SYS] EXO\_921-214

OpenVMS V9.0 and later requires that the target system disk be initialized with On-Disk Structure Level 5 (ODS-5).

Hard links can be enabled on ODS-5 disks. WBEM Services for OpenVMS does not require hard links. (? for more information)

Do you want to enable hard links? (Yes/No/?) y

You have chosen to install OpenVMS X86-64 on a new disk.

The target system disk, DKB100:, will be initialized with structure level 5 (ODS-5).  
Hard links WILL be enabled.  
The disk will be labeled EXO\_921-214.  
Any data currently on the target system disk will be lost.

Is this OK? (Yes/No) y

Initializing and mounting target....

Creating page file....

You must enter a password for the SYSTEM account.

The password must be a minimum of 15 characters in length, and may not exceed 31 characters. It will be checked and verified. The system will not accept passwords that can be guessed easily.

The password will not be displayed as you enter it.

Password for SYSTEM account:

Re-enter SYSTEM password for verification:

For your system to operate properly, you must set two parameters: SCSNODE and SCSSYSTEMID.

SCSNODE can be from 1 to 6 letters or numbers. It must contain at least one letter.

If you plan to use DECnet, SCSNODE must be the DECnet Phase IV node name, or the DECnet-Plus (Phase V) node synonym.

If you have multiple OpenVMS systems, the SCSNODE on each system must be unique.

Enter SCSNODE: mynode

If you plan to use DECnet, SCSSYSTEMID must be set based on the DECnet Phase IV address.

Do you plan to use DECnet? (Yes/No) [Yes]

DECnet Phase IV addresses are in the format

DECnet\_area\_number.DECnet\_node\_number

DECnet\_area\_number is a number between 1 and 63.

DECnet\_node\_number is a number between 1 and 1023.

## Appendix B. Sample Installation and Upgrade Logs

---

If you plan to use DECnet WITHOUT Phase IV compatible addresses,  
enter 0.0.

Enter DECnet (Phase IV) Address: [1.1] 1.410

SCSSYSTEMID will be set to 1434.

This was calculated as follows:

(DECnet\_area\_number \* 1024) + DECnet\_node\_number

Configuring the Local Time Zone

TIME ZONE SPECIFICATION -- MAIN Time Zone Menu                    "\*" indicates a menu

0* GMT			
1* AFRICA	17) EST	33) IRAN	49) PORTUGAL
2* AMERICA	18) EST5EDT	34) ISRAEL	50) PRC
3* ANTARCTICA	19* ETC	35) JAMAICA	51) PST8PDT
4* ARCTIC	20* EUROPE	36) JAPAN	52) ROC
5* ASIA	21) FACTORY	37) KWAJALEIN	53) ROK
6* ATLANTIC	22) GB-EIRE	38) LIBYA	54) SINGAPORE
7* AUSTRALIA	23) GB	39) MET	55) TURKEY
8* BRAZIL	24) GMT-0	40* MEXICO	56) UCT
9* CANADA	25) GMT	41* MIDEAST	57) UNIVERSAL
10) CET	26) GMT0	42) MST	58* US
11* CHILE	27) GMTPLUS0	43) MST7MDT	59) UTC
12) CST6CDT	28) GREENWICH	44) NAVAJO	60) W-SU
13) CUBA	29) HONGKONG	45) NZ-CHAT	61) WET
14) EET	30) HST	46) NZ	62) ZULU
15) EGYPT	31) ICELAND	47* PACIFIC	
16) EIRE	32* INDIAN	48) POLAND	

Press "Return" to redisplay, enter "=" to search or "?" for help, or  
Select the number above that best represents the desired time zone: 58

US Time Zone Menu    "\*" indicates a menu

0* RETURN TO MAIN TIME ZONE MENU			
1) ALASKA	5) EAST-INDIANA	9) MICHIGAN	13) SAMOA
2) ALEUTIAN	6) EASTERN	10) MOUNTAIN	
3) ARIZONA	7) HAWAII	11) PACIFIC-NEW	
4) CENTRAL	8) INDIANA-STARKE	12) PACIFIC	

Press "Return" to redisplay, enter "=" to search or "?" for help, or  
Select the number above that best represents the desired time zone: 6

You selected US / EASTERN as your time zone.  
Is this correct? (Yes/No) [YES]:

Configuring the Time Differential Factor (TDF)

Default Time Differential Factor for standard time is -5:00.  
Default Time Differential Factor for daylight saving time is -4:00.

The Time Differential Factor (TDF) is the difference between your  
system time and Coordinated Universal Time (UTC). UTC is similar  
in most respects to Greenwich Mean Time (GMT).

The TDF is expressed as hours and minutes, and should be entered  
in the hh:mm format. TDFs for the Americas will be negative  
(-3:00, -4:00, etc.); TDFs for Europe, Africa, Asia and Australia  
will be positive (1:00, 2:00, etc.).

This time zone supports daylight saving time.

## Appendix B. Sample Installation and Upgrade Logs

---

Is this time zone currently on daylight saving time? (Yes/No): n

Enter the Time Differential Factor [-5:00]:

NEW SYSTEM TIME DIFFERENTIAL FACTOR = -5:00

Is this correct? [Y]:

If you have Product Authorization Keys (PAKs) to register,  
you can register them now.

Do you want to register any Product Authorization Keys? (Yes/No) [Yes] n

The following products are part of the OpenVMS installation;  
they will be installed along with the OpenVMS operating system:

- o Availability Manager (base) for OpenVMS X86-64
- o TCP/IP Services for OpenVMS X86-64
- o KERBEROS for OpenVMS X86-64
- o SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7)
- o SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)
- o OpenSSH for OpenVMS X86-64
- o 64-bit PERL for OpenVMS X86-64

You can also install the following optional products along with the  
OpenVMS operating system:

- o DECwindows Motif for OpenVMS X86-64
- o DECnet-Plus for OpenVMS X86-64
- o DECnet Phase IV for OpenVMS X86-64

If you want to change your selections, you can do so later in the  
installation by answering "NO" to the following question:

"Do you want the defaults for all options?"

Do you want to install DECwindows Motif for OpenVMS X86-64 V1.8?  
(Yes/No) [Yes]

The DECnet-Plus kit is provided with the OpenVMS operating system kit.  
DECnet Phase IV applications are supported by DECnet-Plus.

DECnet Phase IV is also provided as an option.

If you install DECnet-Plus and TCP/IP you can run DECnet  
applications over a TCP/IP network. Please refer to the  
VSI DECnet-Plus for OpenVMS Planning Guide for information  
on running DECnet over TCP/IP.

Do you want to install DECnet-Plus for OpenVMS X86-64 V9.2-D?  
(Yes/No) [Yes] n

Do you want to install DECnet Phase IV for OpenVMS X86-64 V9.2-1?  
(Yes/No) [Yes]

The installation operation can provide brief or detailed descriptions.  
In either case, you can request the detailed descriptions by typing ?.

## Appendix B. Sample Installation and Upgrade Logs

---

Do you always want detailed descriptions? (Yes/No) [No]

Performing product kit validation of signed kits ...

```
%PCSI-I-VSIVALPASSED, validation of DMM1:[VMS$COMMON]VSI-X86VMS-VMS-E0902-1-2.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DWMOTIF_SUPPORT_X860921_KIT]VSI-X86VMS-
DWMOTIF_SUPPORT-E0902-1-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.AVAIL_MAN_BASE_KIT]VSI-X86VMS-
AVAIL_MAN_BASE-E0902-1-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.TCPIP]VSI-X86VMS-TCPIP-X0600-20-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.SSL3]VSI-X86VMS-SSL3-V0300-7-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.KERBEROS]VSI-X86VMS-KERBEROS-V0303-2A-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.SSL111]VSI-X86VMS-SSL111-V0101-1S-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.OPENSSSH]VSI-X86VMS-OPENSSSH-V0809-1D-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.PERL534]VMSPTS-X86VMS-PERL534-
T0534-0-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DWMOTIF]VSI-X86VMS-DWMOTIF-V0108--1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DECNET_PLUS]VSI-X86VMS-DECNET_PLUS-V0902-
D-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DECNET_PHASE_IV_X860921_KIT]VSI-X86VMS-
DECNET_PHASE_IV-E0902-1-1.PCSI$COMPRESSED;1 succeeded
```

The following product has been selected:

```
VSI X86VMS OPENVMS V9.2-1          Platform (product suite)
```

Configuration phase starting ...

You will be asked to choose options, if any, for each selected product and for any products that may be installed to satisfy software dependency requirements.

Configuring VSI X86VMS OPENVMS V9.2-1: OPENVMS and related products Platform

Copyright 2015-2023 VMS Software, Inc.

VMS Software, Inc.

Do you want the defaults for all options? [YES]

Availability Manager (base) for OpenVMS X86-64

TCP/IP Services for OpenVMS X86-64

\* Product VSI X86VMS TCPIP X6.0-20 requires a system reboot.  
Can the system be REBOOTED after the installation completes? [YES]

KERBEROS for OpenVMS X86-64

SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7)

SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)

OpenSSH for OpenVMS X86-64

64-bit PERL for OpenVMS X86-64

Do you want to review the options? [NO]

Execution phase starting ...

The following products will be installed to destinations:

```
VMSPTS X86VMS PERL534 T5.34-0          DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS AVAIL_MAN_BASE V9.2-1      DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS DECNET_PHASE_IV V9.2-1     DISK$EXO_921-214:[VMS$COMMON.]
```



```

VSI X86VMS DWMOTIF V1.8          DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS DWMOTIF_SUPPORT V9.2-1 DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS KERBEROS V3.3-2A      DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS OPENSSSH V8.9-1D      DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS OPENVMS V9.2-1        DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS SSL111 V1.1-1S        DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS SSL3 V3.0-7           DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS TCPIP X6.0-20         DISK$EXO_921-214:[VMS$COMMON.]
VSI X86VMS VMS V9.2-1            DISK$EXO_921-214:[VMS$COMMON.]

Portion done: 0%...10%...20%...30%...40%...50%...60%...70%...80%

Restoring STARTUP.NSH file(s)...

No files restored

...90%
%PCSI-I-PRCOUTPUT, output from subprocess follows ...
% - Execute SYS$MANAGER:TCPIP$CONFIG.COM to proceed with configuration of
%   VSI TCP/IP Services for OpenVMS.
%
Portion done: 100%

The following products have been installed:
VMSPTS X86VMS PERL534 T5.34-0      Layered Product
VSI X86VMS AVAIL_MAN_BASE V9.2-1    Layered Product
VSI X86VMS DECNET_PHASE_IV V9.2-1  Layered Product
VSI X86VMS DWMOTIF V1.8            Layered Product
VSI X86VMS DWMOTIF_SUPPORT V9.2-1   Layered Product
VSI X86VMS KERBEROS V3.3-2A        Layered Product
VSI X86VMS OPENSSSH V8.9-1D        Layered Product
VSI X86VMS OPENVMS V9.2-1          Platform (product suite)
VSI X86VMS SSL111 V1.1-1S          Layered Product
VSI X86VMS SSL3 V3.0-7             Layered Product
VSI X86VMS TCPIP X6.0-20           Layered Product
VSI X86VMS VMS V9.2-1              Operating System

VSI X86VMS OPENVMS V9.2-1: OPENVMS and related products Platform

VSI X86VMS TCPIP X6.0-20: VSI TCP/IP Services for OpenVMS.

VSI X86VMS SSL3 V3.0-7: SSL3 for OpenVMS X86-64 V3.0-7 (Based on OpenSSL 3.0.7)

Insert the following lines in SYS$MANAGER:SYSTARTUP_VMS.COM:
@SYS$STARTUP:SSL3$STARTUP.COM
Insert the following lines in SYS$MANAGER:SYSHUTDOWN.COM:
@SYS$STARTUP:SSL3$SHUTDOWN.COM

Review the Installation Guide and Release Notes for post install directions.

Review the Installation Guide and Release Notes for post upgrade verification
suggestions.

Refer to SYS$HELP:SSL30-7-X86.RELEASE_NOTES for more information.

It is recommended to run extended IVP tests as a post-installation step.

Check the release notes for current status of the product.

VSI X86VMS KERBEROS V3.3-2A

Configure and set up Kerberos

If Kerberos will be run on this system, but has not been
used previously, you need to perform the following steps.

o Run the Kerberos configuration procedure:

@SYS$STARTUP:KRB$CONFIGURE.COM

```

o Add the following line to SYS\$MANAGER:SYSTARTUP\_VMS.COM:

```
$ @SYS$STARTUP:KRB$STARTUP
```

o Add the following line to SYS\$MANAGER:SYLOGIN.COM:

```
$ @SYS$MANAGER:KRB$SYMBOLS
```

VSI X86VMS SSL3 V3.0-7: SSL3 for OpenVMS X86-64 V3.0-7 (Based on OpenSSL 3.0.7)

Insert the following lines in SYS\$MANAGER:SYSTARTUP\_VMS.COM:

```
@SYS$STARTUP:SSL3$STARTUP.COM
```

Insert the following lines in SYS\$MANAGER:SYSHUTDOWN.COM:

```
@SYS$STARTUP:SSL3$SHUTDOWN.COM
```

Review the Installation Guide and Release Notes for post install directions.

Review the Installation Guide and Release Notes for post upgrade verification suggestions.

Refer to SYS\$HELP:SSL30-7-X86.RELEASE\_NOTES for more information.

It is recommended to run extended IVP tests as a post-installation step.

VSI X86VMS SSL111 V1.1-1S: SSL111 for OpenVMS X86-64 V1.1-1S (Based on OpenSSL 1.1.1S)

Review the Installation Guide and Release Notes for post install directions.

Review the Installation Guide and Release Notes for post upgrade verification suggestions.

Refer to SYS\$HELP:SSL111-S-X86.RELEASE\_NOTES for more information.

VMSPORTS X86VMS PERL534 T5.34-0

Post-installation tasks are required for Perl for OpenVMS.

To use the Perl provided with this kit, run the following set-up command procedure, assuming you installed in SYS\$COMMON.

```
$ @sys$common:[perl-5_34]perl_setup.com
```

You may wish to put that command in SYS\$MANAGER:SYLOGIN.COM to make Perl available to all users on the system.

Perl includes its own help system called perldoc. Type

```
$ perldoc perldoc
```

for the documentation to perldoc itself. Type

```
$ perldoc perldelta
```

for the changes that are new in version T5.34-0 of Perl.

There are many Perl-related resources on the web; point your browser at:

```
http://www.perl.org
```

to get started, and thank you for using Perl for OpenVMS.

%PCSI-I-SYSTEM\_REBOOT, executing reboot procedure ...

Shutdown/reboot deferred when this product is installed as part of the O/S installation/upgrade

%PCSI-I-SYSTEM\_REBOOT, executing reboot procedure ...

Running SYS\$UPDATE:SYS\$MD.COM to update the memory disk...

Created memory disk DKB100:[VMS\$COMMON.SYS\$LDR]SYS\$MD.DSK;1  
- using 181664 blocks in 1 extent with 1013 spare blocks  
- mounted on LDM9776: with volume label MD23053B0F9A  
- contains OpenVMS V9.2-1

%LD-I-UNIT, Allocated device is LDM9777:

The installation is now complete.

When the newly installed system is first booted, a special startup procedure will be run. This procedure will:

- o Configure the system for standalone or OpenVMS Cluster operation.
- o Run AUTOGEN to set system parameters.
- o Reboot the system with the newly set parameters.

You may shut down now or continue with other operations.

Process X86VMS\_INSTALL logged out at 22-FEB-2023 12:35:35.20

Press Return to continue...

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system or you can install or upgrade layered products that are included on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform "standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?) 9

Shutting down the system

VSI Dump Kernel SYSBOOT Jan 23 2023 14:03:45  
\*\* Error logs not dumped, system disk is write locked.

SYSTEM SHUTDOWN COMPLETE

\*\*\*\* Hit any key to reboot system \*\*\*\*

Restarting the system...

## Appendix B. Sample Installation and Upgrade Logs

---

VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing  
ENABLED: Crash Dump Processing  
ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:  
PASSED

BOOT MANAGER DEVICE: DKB100  
DEFAULT BOOT COMMAND: BOOT DKB0 0 00000001

VIRTUAL MACHINE GUEST:  
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.  
Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

DKB100	(HD) = FS1	UEFI: E9_2_1	VMS: EXO_921-214	8192	MB	SATA Disk
DKB0	(DVD) = FS3	UEFI: E9_2_1	VMS: None	1574	MB	SATA DVD

BOOTMGR> BOOT DKB100:  
Booting...

%%%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%%

---

GRAPHICAL OUTPUT HAS BEEN SUSPENDED  
USE A TERMINAL UTILITY FOR ACCESS

---

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

%SYSBOOT-I-VMTYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

VMS Software, Inc. OpenVMS (TM) x86\_64 Operating System, V9.2-1  
Copyright 2023 VMS Software, Inc.

MDS Mitigation active, variant verw(MD\_CLEAR)

%SMP-I-CPUTRN, CPU #2 has joined the active set.  
%SMP-I-CPUTRN, CPU #3 has joined the active set.  
%SMP-I-CPUTRN, CPU #1 has joined the active set.

Installing required known files...

Configuring devices...

%STARTUP-E-NOPAGFIL, No page files have been successfully installed.

%SYSTEM-I-BOOTUPGRADE, security auditing disabled  
%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.36 %%%%%%%%%%  
Operator \_MYNODE\$OPA0: has been enabled, username SYSTEM

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.36 %%%%%%%%%%  
Operator status for operator \_MYNODE\$OPA0:  
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,  
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,  
OPER11, OPER12

```

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.38 %%%%%%%%%%%
Logfile has been initialized by operator _MYNODE$OPA0:
Logfile is MYNODE::SYS$SYSROOT:[SYSMGR]OPERATOR.LOG;1

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.38 %%%%%%%%%%%
Operator status for operator MYNODE::SYS$SYSROOT:[SYSMGR]OPERATOR.LOG;1
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,
OPER11, OPER12

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.46 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%JBC-E-OPENERR, error opening SYS$COMMON:[SYSEXE]QMAN$MASTER.DAT;

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.46 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
-RMS-E-FNF, file not found

%LICENSE-F-EMTLDB, license database contains no license records
%SYSTEM-I-BOOTUPGRADE, security server not started
%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.58 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
TDF-I-SETTDF TDF set new timezone differential

%%%%%%%%%% OPCOM 22-FEB-2023 12:37:51.74 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager

%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager
Startup processing continuing...

%SYSTEM-I-BOOTUPGRADE, Coordinated Startup not performed
%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04

AUTOGEN will now be run to compute the new system parameters. The system
will then shut down and reboot, and the installation or upgrade will be
complete.

After rebooting you can continue with such system management tasks as:

    Configuring networking software (TCP/IP Services, DECnet, other)
    Using SYS$MANAGER:CLUSTER_CONFIG.COM to create an OpenVMS Cluster
    Creating FIELD, SYSTEST and SYSTEST_CLIG accounts if needed

%AUTOGEN-I-BEGIN, GETDATA phase is beginning.
%AUTOGEN-I-NEWFILE, Previous contents of SYS$SYSTEM:CLU$PARAMS.DAT have
been copied to SYS$SYSTEM:CLU$PARAMS.OLD. You may wish to purge
SYS$SYSTEM:CLU$PARAMS.OLD.
%AUTOGEN-I-NEWFILE, Previous contents of SYS$SYSTEM:CLU$PARAMS.DAT have
been copied to SYS$SYSTEM:CLU$PARAMS.OLD. You may wish to purge
SYS$SYSTEM:CLU$PARAMS.OLD.
%AUTOGEN-I-NEWFILE, A new version of SYS$SYSTEM:PARAMS.DAT has been created.
You may wish to purge this file.
%AUTOGEN-I-END, GETDATA phase has successfully completed.
%AUTOGEN-I-BEGIN, GENPARAMS phase is beginning.
%AUTOGEN-I-NEWFILE, A new version of SYS$MANAGER:VMSIMAGES.DAT has been created.
You may wish to purge this file.
%AUTOGEN-I-NEWFILE, A new version of SYS$SYSTEM:SETPARAMS.DAT has been created.
You may wish to purge this file.
%AUTOGEN-I-END, GENPARAMS phase has successfully completed.
%AUTOGEN-I-BEGIN, GENFILES phase is beginning.
%SYSGEN-I-CREATED, SYS$SYSROOT:[SYSEXE]SYS$ERRLOG.DMP;2 created

```

## Appendix B. Sample Installation and Upgrade Logs

---

```
*****
%AUTOGEN-W-REPORT, Warnings were detected by AUTOGEN. Please review the
    information given in the file SYS$SYSTEM:AGEN$PARAMS.REPORT
*****

%AUTOGEN-I-REPORT, AUTOGEN has produced some informational messages which
    have been stored in the file SYS$SYSTEM:AGEN$PARAMS.REPORT. You may
    wish to review the information in that file.

%AUTOGEN-I-END, GENFILES phase has successfully completed.
%AUTOGEN-I-BEGIN, SETPARAMS phase is beginning.
%%%%%%%%%% OPCOM 22-FEB-2023 12:38:09.01 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%SYSGEN-I-WRITECUR, CURRENT system parameters modified by process ID 0000023 in
to file SYS$SYSROOT_MD:[SYSEXE]X86_64VMS$SYS.PAR;2

%AUTOGEN-I-SYSGEN, parameters modified
%AUTOGEN-I-END, SETPARAMS phase has successfully completed.
%AUTOGEN-I-BEGIN, REBOOT phase is beginning.

The system is shutting down to allow the system to boot with the
generated site-specific parameters and installed images.

The system will automatically reboot after the shutdown and the
upgrade will be complete.

        SHUTDOWN -- Perform an Orderly System Shutdown
                on node MYNODE

%SHUTDOWN-I-BOOTCHECK, performing reboot consistency check...
%SHUTDOWN-I-CHECKOK, basic reboot consistency check completed

%SHUTDOWN-I-OPERATOR, this terminal is now an operator's console
%SHUTDOWN-I-DISLOGINS, interactive logins will now be disabled
%SET-I-INTSET, login interactive limit = 0, current interactive value = 0
%SHUTDOWN-I-STOPQUEUES, the queues on this node will now be stopped
%%%%%%%%%% OPCOM 22-FEB-2023 12:38:09.36 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%JBC-E-OPENERR, error opening SYS$COMMON:[SYSEXE]QMAN$MASTER.DAT;

%%%%%%%%%% OPCOM 22-FEB-2023 12:38:09.36 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
-RMS-E-FNF, file not found

SHUTDOWN message on MYNODE from user SYSTEM at MYNODE Batch 12:38:09
MYNODE will shut down in 0 minutes; back up soon. Please log off node MYNODE.
Reboot system with AUTOGENerated parameters

%SHUTDOWN-I-STOPUSER, all user processes will now be stopped
%SHUTDOWN-I-STOPCPU, the secondary processors will now be stopped
%SMP-I-CPUTRN, CPU #1 was removed from the active set.
%SMP-I-CPUTRN, CPU #2 was removed from the active set.
%SMP-I-CPUTRN, CPU #3 was removed from the active set.
%SHUTDOWN-I-REMOVE, all installed images will now be removed
%SET-I-PXROOSET, system POSIX root set to SYS$SY$DEVICE:[000000]
%SHUTDOWN-I-DISMOUNT, all volumes will now be dismounted
%%%%%%%%%% OPCOM 22-FEB-2023 12:38:09.66 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
STARTUP, MYNODE shutdown was requested by the operator.

VSI Dump Kernel SYSBOOT Jan 23 2023 14:03:45
** Dumping error logs to the system disk (MYNODE$DKB100:)
```

## Appendix B. Sample Installation and Upgrade Logs

---

```
** Error logs dumped to MYNODE$DKB100:[SYS0.SYSEXE]SYS$ERRLOG.DMP
** (used 36 out of 96 available blocks)
```

Restarting the system...

VSI OpenVMS Boot Manager: V9.2-1, Build 122

```
ENABLED: Symmetric Multi-Processing
ENABLED: Crash Dump Processing
ENABLED: Console output to Legacy COM 1 Port
```

```
Checking Required Processor Features:
PASSED
```

```
BOOT MANAGER DEVICE: DKB100
DEFAULT BOOT COMMAND: BOOT DKB100 0 00000001
```

```
VIRTUAL MACHINE GUEST:
VMware (tm) No Mouse support; Use Commands or Arrow Keys
```

```
CONNECT A REMOTE TERMINAL SESSION NOW.
Enter the TERMINAL command for remote connection assistance.
```

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

```
DKB100      (HD) = FS1      UEFI: E9_2_1      VMS: EXO_921-214  8192 MB  SATA Disk
DKB0        (DVD) = FS3      UEFI: E9_2_1      VMS: None        1574 MB  SATA DVD
```

```
BOOTMGR> BOOT DKB100:
Booting...
```

```
%%%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%%%
```

---

GRAPHICAL OUTPUT HAS BEEN SUSPENDED  
USE A TERMINAL UTILITY FOR ACCESS

---

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

%SYSBOOT-I-VMTYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

```
VMS Software, Inc. OpenVMS (TM) x86_64 Operating System, V9.2-1
Copyright 2023 VMS Software, Inc.
```

MDS Mitigation active, variant verw(MD\_CLEAR)

```
%SMP-I-CPUTRN, CPU #1 has joined the active set.
%SMP-I-CPUTRN, CPU #3 has joined the active set.
%SMP-I-CPUTRN, CPU #2 has joined the active set.
%STDRV-I-STARTUP, OpenVMS startup begun at 22-FEB-2023 12:39:00.27
%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04
%RUN-S-PROC_ID, identification of created process is 00000404
%RUN-S-PROC_ID, identification of created process is 00000405
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.31 %%%%%%%%%%%
Operator _MYNODE$OPA0: has been enabled, username SYSTEM

%SET-I-NEWAUDSRV, identification of new audit server process is 0000040B
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.31 %%%%%%%%%%%
Operator status for operator _MYNODE$OPA0:
```

## Appendix B. Sample Installation and Upgrade Logs

---

CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,  
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,  
OPER11, OPER12

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.34 %%%%%%%%%%%  
Logfile has been initialized by operator \_MYNODE\$OPA0:  
Logfile is MYNODE::SYS\$SYSROOT:[SYSMGR]OPERATOR.LOG;2

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.34 %%%%%%%%%%%  
Operator status for operator MYNODE::SYS\$SYSROOT:[SYSMGR]OPERATOR.LOG;2  
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,  
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,  
OPER11, OPER12

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.36 %%%%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
%AUDSRV-I-NEWSEVERDB, new audit server database created ( PC 00000000.8001A365)

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.38 %%%%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
%AUDSRV-I-REMNABLED, resource monitoring enabled for journal SECURITY

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.39 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%JBC-E-OPENERR, error opening SYS\$COMMON:[SYSEXE]QMAN\$MASTER.DAT;

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.39 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
-RMS-E-FNF, file not found

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.40 %%%%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
%AUDSRV-I-NEWOBJECTDB, new object database created ( PC 00000000.8001FA80)

%LICENSE-F-EMTLDB, license database contains no license records  
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.50 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-SERVERSTARTINGU, security server starting up

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.51 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-CIACRECLUDB, security server created cluster intrusion database

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.51 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-CIASTARTINGUP, breakin detection and evasion processing now starting u  
p

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.54 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
TDF-I-SETTDF TDF set new timezone differential

%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.67 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
Warning: DECdtm log file not found (SYS\$JOURNAL:SYSTEM\$MYNODE.LM\$JOURNAL)  
%RMS-E-FNF, file not found  
TP server process waiting

%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node  
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:10.67 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node  
-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager



## Appendix B. Sample Installation and Upgrade Logs

---

-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager  
Startup processing continuing...

%STARTUP-I-AUDITCONTINUE, audit server initialization complete  
%%%%%%%% OPCOM 22-FEB-2023 12:39:13.48 %%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14  
34  
Auditable event: Audit server starting up  
Event time: 22-FEB-2023 12:39:13.46  
PID: 00000403  
Username: SYSTEM

%%%%%%%% OPCOM 22-FEB-2023 12:39:13.52 %%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-PROXYSTARTINGUP, proxy processing now starting up

%%%%%%%% OPCOM 22-FEB-2023 12:39:13.52 %%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-E-NOPROXYDB, cannot find proxy database file NET\$PROXY.DAT  
%RMS-E-FNF, file not found

The OpenVMS system is now executing the site-specific startup commands.

%%%%%%%% OPCOM 22-FEB-2023 12:39:13.81 %%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14  
34  
Auditable event: Identifier added  
Event time: 22-FEB-2023 12:39:13.81  
PID: 00000403  
Process name: STARTUP  
Username: SYSTEM  
Process owner: [SYSTEM]  
Image name: MYNODE\$DKB100:[SYS0.SYSCOMMON.][SYSEXE]AUTHORIZE.EXE  
Identifier name: SYS\$NODE\_MYNODE  
Identifier value: %X80010000  
Attributes: none  
Posix UID: -2  
Posix GID: -2 (%FFFFFFFFE)

%UAF-I-RDBADDMSG, identifier SYS\$NODE\_MYNODE value %X80010000 added to rights da  
tabase  
%%%%%%%% OPCOM 22-FEB-2023 12:39:13.87 %%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14  
34  
Auditable event: Identifier added  
Event time: 22-FEB-2023 12:39:13.87  
PID: 00000403  
Process name: STARTUP  
Username: SYSTEM  
Process owner: [SYSTEM]  
Image name: MYNODE\$DKB100:[SYS0.SYSCOMMON.][SYSEXE]AUTHORIZE.EXE  
Identifier name: DECW\$WS\_QUOTA  
Identifier value: %X80010001  
Attributes: none  
Posix UID: -2  
Posix GID: -2 (%FFFFFFFFE)

%UAF-I-RDBADDMSG, identifier DECW\$WS\_QUOTA value %X80010001 added to rights data  
base  
%%%%%%%% OPCOM 22-FEB-2023 12:39:13.91 %%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14  
34

```
Auditable event:      Identifier added
Event time:          22-FEB-2023 12:39:13.91
PID:                00000403
Process name:       STARTUP
Username:           SYSTEM
Process owner:     [SYSTEM]
Image name:        MYNODE$DKB100:[SYS0.SYSCOMMON.][SYSEXE]IMGDMP_RIGHTS.E
XE;1
Identifier name:    IMGDMP$READALL
Identifier value:   %X90390001
Attributes:        none
Posix UID:         -2
Posix GID:         -2 (%XFFFFFFFFE)
```

```
%PROCDUMP-I-CREATED, rights identifier IMGDMP$READALL successfully created
%PROCDUMP-I-CREATED, rights identifier IMGDMP$PROTECT successfully created
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:13.93 %%%%%%%%%%%
Message from user AUDIT$SERVER on MYNODE
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14
34
```

```
Auditable event:      Identifier added
Event time:          22-FEB-2023 12:39:13.93
PID:                00000403
Process name:       STARTUP
Username:           SYSTEM
Process owner:     [SYSTEM]
Image name:        MYNODE$DKB100:[SYS0.SYSCOMMON.][SYSEXE]IMGDMP_RIGHTS.E
XE;1
Identifier name:    IMGDMP$PROTECT
Identifier value:   %X90390002
Attributes:        RESOURCE
Posix UID:         -2
Posix GID:         -2 (%XFFFFFFFFE)
```

```
%SET-I-INTSET, login interactive limit = 64, current interactive value = 0
%RUN-S-PROC_ID, identification of created process is 00000412
%%%%%%%%%% OPCOM 22-FEB-2023 12:39:14.05 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%SMHANDLER-S-STARTUP, server management event handler startup
```

```
SYSTEM          job terminated at 22-FEB-2023 12:39:16.04
```

```
Accounting information:
Buffered I/O count:          2981      Peak working set size:      13824
Direct I/O count:           1554      Peak virtual size:          278400
Page faults:                 3838      Mounted volumes:            0
Charged CPU time:           0 00:00:01.88  Elapsed time:               0 00:00:15.80
```

```
Welcome to OpenVMS (TM) x86_64 Operating System, Version V9.2-1
```

```
Username: system
Password:
%LICENSE-I-NOLICENSE, no license is active for this software product
%LOGIN-S-LOGOPRCON, login allowed from OPA0:
VMS Software, Inc. OpenVMS (TM) x86_64 Operating System, V9.2-1
$
```

## B.2. Sample Upgrade Log

Below is the sample upgrade log.

```
ip-10-0-0-54::~ aprilsmith$ telnet 192.168.98.5 2022
Trying 192.168.98.5...
Connected to 192.168.98.5.
Escape character is '^]'.
^]
telnet> mode char
```

DEVICES

VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing  
 ENABLED: Crash Dump Processing  
 ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:  
 PASSED

BOOT MANAGER DEVICE: DKB0  
 DEFAULT BOOT COMMAND: BOOT DKB0 0 00000001

VIRTUAL MACHINE GUEST:  
 VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.  
 Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

DKA0	(HD) = FS0	UEFI: X9_2_XG8Z	VMS: EXO_XG8Z	8192 MB	SCSI Disk
DKB100	(HD) = FS1	UEFI: E9_2_1	VMS: EXO_921-214	8192 MB	SATA Disk
DKD100	(HD) = FS2	UEFI: V9_2	VMS: EXO_XG9N-JN6	8192 MB	SCSI Disk
DKD300	(HD) = FS3	UEFI: V9_2	VMS: EXO_XG9N-JN7	8192 MB	SCSI Disk
DKB0	(DVD) = FS4	UEFI: E9_2_1	VMS: None	1574 MB	SATA DVD

BOOTMGR> BOOT DKB0

Booting...

%VMS\_BOOTMGR-I-INSTALL, Booting an OpenVMS Installation Kit...  
 100%

%%%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%%

---

GRAPHICAL OUTPUT HAS BEEN SUSPENDED  
 USE A TERMINAL UTILITY FOR ACCESS

---

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

%SYSBOOT-I-VMTYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

VMS Software, Inc. OpenVMS (TM) x86\_64 Operating System, V9.2-1  
 Copyright 2023 VMS Software, Inc.

MDS Mitigation active, variant verw(MD\_CLEAR)

%SMP-I-CPUTRN, CPU #2 has joined the active set.  
 %SMP-I-CPUTRN, CPU #3 has joined the active set.  
 %SMP-I-CPUTRN, CPU #1 has joined the active set.

Installing required known files...

Configuring devices...

%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04

## Appendix B. Sample Installation and Upgrade Logs

---

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system or you can install or upgrade layered products that are included on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform "standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?) 1

\*\*\*\*\*

This procedure will ask a series of questions.

- () - encloses acceptable answers
- [] - encloses default answers

Type your response and press the <Return> key. Type:

- ? - to repeat an explanation
- ^ - to change prior input (not always possible)
- Ctrl/Y - to exit the installation procedure

This procedure installs the OpenVMS X86-64 operating system.

All software and data files that were previously on the target disk will be removed.

Do you want to INITIALIZE or to PRESERVE? [PRESERVE]

You must enter the device name for the target disk on which OpenVMS X86-64 will be installed.

Enter device name for target disk: (? for choices) ??

Device Name	Device Type Name	Volume Label	Size (blocks/xB)	
DKA0:	VMware Virtual disk	EXO_XG8Z	16777216	8.00GB
DKB100:	ATA VMware Virtual S	EXO_921-214	16777216	8.00GB
DKD100:	VMware Virtual disk	EXO_XG9N-JN6	16777216	8.00GB
DKD200:	VMware Virtual disk		4194304	2.00GB
DKD300:	VMware Virtual disk	EXO_XG9N-JN7	16777216	8.00GB

Enter device name for target disk: (? for choices) dkd300:

DKD300: is now labeled EXO\_XG9N-JN7.

Do you want to keep this label? (Yes/No) [Yes] n

Enter volume label for target system disk: [X86SYS] exo92\_921

OpenVMS X86-64 will be upgraded on DKD300:.

The following products are part of the OpenVMS installation;

if necessary they will be installed or upgraded along with the OpenVMS operating system.

- o Availability Manager (base) for OpenVMS X86-64
- o TCP/IP Services for OpenVMS X86-64
- o KERBEROS for OpenVMS X86-64
- o SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7)
- o SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)
- o OpenSSH for OpenVMS X86-64
- o 64-bit PERL for OpenVMS X86-64

If necessary, the following optional products will also be upgraded along with the OpenVMS operating system.

- o DECwindows Motif for OpenVMS X86-64
- o DECnet-Plus for OpenVMS X86-64
- o DECnet Phase IV for OpenVMS X86-64

If you want to add or delete optional products, you can do so later in the upgrade by answering "NO" to the following question:

"Do you want the defaults for all options?"

Availability Manager (base) for OpenVMS X86-64  
is installed on your system. It will be upgraded.

TCP/IP Services for OpenVMS X86-64  
is installed on your system. It will be upgraded.

KERBEROS for OpenVMS X86-64  
is installed on your system. It will be upgraded.

SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7) is required.  
It will be installed.

SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)  
is installed on your system. It will be upgraded.

OpenSSH for OpenVMS X86-64  
is installed on your system. It will be upgraded.

64-bit PERL for OpenVMS X86-64 T5.34-0  
is already installed on your system. An upgrade is not required.

DECwindows Motif for OpenVMS X86-64 V1.8  
is already installed on your system. An upgrade is not required.

The DECnet-Plus kit is provided with the OpenVMS operating system kit.  
DECnet Phase IV applications are supported by DECnet-Plus.

DECnet Phase IV is also provided as an option.

## Appendix B. Sample Installation and Upgrade Logs

---

If you install DECnet-Plus and TCP/IP you can run DECnet applications over a TCP/IP network. Please refer to the VSI DECnet-Plus for OpenVMS Planning Guide for information on running DECnet over TCP/IP.

Do you want to install DECnet-Plus for OpenVMS X86-64 V9.2-D?  
(Yes/No) [Yes] n

DECnet Phase IV for OpenVMS X86-64  
is installed on your system. It will be upgraded.

The installation operation can provide brief or detailed descriptions.  
In either case, you can request the detailed descriptions by typing ?.

Do you always want detailed descriptions? (Yes/No) [No]

Preserving existing copies of STARTUP.NSH if found...

No STARTUP.NSH files were found in the EFI system partition file

Performing product kit validation of signed kits ...

```
%PCSI-I-VSIVALPASSED, validation of DMM1:[VMS$COMMON]VSI-X86VMS-VMS-E0902-1-2.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DWMOTIF_SUPPORT_X860921_KIT]VSI-X86VMS-
DWMOTIF_SUPPORT-E0902-1-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.AVAIL_MAN_BASE_KIT]VSI-X86VMS-
AVAIL_MAN_BASE-E0902-1-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.TCPIP]VSI-X86VMS-TCPIP-X0600-20-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.SSL3]VSI-X86VMS-SSL3-V0300-7-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.KERBEROS]VSI-X86VMS-KERBEROS-V0303-2A-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.SSL111]VSI-X86VMS-SSL111-V0101-1S-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.OPENSSSH]VSI-X86VMS-OPENSSSH-V0809-1D-1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.PERL534]VMSPTS-X86VMS-PERL534-
T0534-0-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DWMOTIF]VSI-X86VMS-DWMOTIF-V0108--1.PCSI
$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DECNET_PLUS]VSI-X86VMS-DECNET_PLUS-V0902-
D-1.PCSI$COMPRESSED;1 succeeded
%PCSI-I-VSIVALPASSED, validation of DMM1:[KITS.DECNET_PHASE_IV_X860921_KIT]VSI-X86VMS-
DECNET_PHASE_IV-E0902-1-1.PCSI$COMPRESSED;1 succeeded
```

The following product has been selected:

VSI X86VMS OPENVMS V9.2-1 Platform (product suite)

Configuration phase starting ...

You will be asked to choose options, if any, for each selected product and for any products that may be installed to satisfy software dependency requirements.

Configuring VSI X86VMS OPENVMS V9.2-1: OPENVMS and related products Platform

Copyright 2015-2023 VMS Software, Inc.

VMS Software, Inc.

Do you want the defaults for all options? [YES]

OpenSSH V8.9-1B exists on your system and must be removed before performing this installation.

To remove OpenSSH V8.9-1B:

- Press RETURN to return to the installation menu
- Choose option 6 (Remove installed products)
- Select the product VSI X86VMS OPENSSH V8.9-1B
- Perform the removal

You will be asked the following question once or twice. Always answer NO:

Terminating is strongly recommended. Do you want to terminate? [YES]

Removal of OpenSSH V1.9-1B will continue, after which you can return to the installation menu and re-run this installation. A new version of OpenSSH will be installed as part of the OpenVMS installation.

%PCSIUI-E-ABORT, operation terminated due to an unrecoverable error condition

Installation has been aborted.

The upgrade has not completed normally.

The target system has been modified.

If you need to return the target system to its original state, you may need to restore your backup of the target system.

If you want to re-do the upgrade, VSI recommends that you restore your backup of the target system. Repeating the upgrade may succeed, but it may also introduce subtle problems.

Process X86VMS\_INSTALL logged out at 27-FEB-2023 21:48:00.50

Press Return to continue...

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system or you can install or upgrade layered products that are included on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform "standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?) 6

\*\*\*\*\*

This procedure will ask a series of questions.

- () - encloses acceptable answers
- [] - encloses default answers

## Appendix B. Sample Installation and Upgrade Logs

---

Type your response and press the <Return> key. Type:

? - to repeat an explanation  
^ - to change prior input (not always possible)  
Ctrl/Y - to exit the installation procedure

You must enter the device name for the target disk on which the operation will be performed.

Enter device name for target disk: [dkd300:] (? for choices) ?

Device Name	Device Status	Error Count	Volume Label	Free Blocks	Trans Count	Mnt Cnt
DMM0:	Offline	0				
DMM1:	Mounted wrtlck	0	X86E9210E	98160	16	1
DKA0:	Online	0				
DKB0:	Online wrtlck	0				
DKB100:	Online	0				
DKD100:	Online	0				
DKD200:	Online	0				
DKD300:	Mounted alloc	0	EX092_921	12362656	1	1

You must enter the device name for the target disk on which the operation will be performed.

Enter device name for target disk: [dkd300:] (? for choices)

DKD300: is labeled EX092\_921.

The remove operation can provide brief or detailed descriptions. In either case, you can request the detailed descriptions by typing ?.

Do you always want detailed descriptions? (Yes/No) [No]

- 1 - VMSPORTS X86VMS PERL534 T5.34-0 Layered Product
- 2 - VSI X86VMS AVAIL\_MAN\_BASE V9.2 Layered Product
- 3 - VSI X86VMS DECNET\_PHASE\_IV V9.2 Layered Product
- 4 - VSI X86VMS DWMOTIF V1.8 Layered Product
- 5 - VSI X86VMS DWMOTIF\_SUPPORT V9.2 Layered Product
- 6 - VSI X86VMS KERBEROS V3.3-2 Layered Product
- 7 - VSI X86VMS OPENSSH V8.9-1B Layered Product
- 8 - VSI X86VMS OPENVMS V9.2 Platform (product suite)
- 9 - VSI X86VMS SSL111 V1.1-1N Layered Product
- 10 - VSI X86VMS TCPIP X6.0-16 Layered Product
- 11 - VSI X86VMS VMS V9.2 Operating System
- 12 - All products listed above
- ? - Help
- E - Exit

Choose one or more items from the menu: 7

The following product has been selected:

VSI X86VMS OPENSSH V8.9-1B Layered Product

Do you want to continue? [YES]

%PCSI-E-HRDREF, product VSI X86VMS OPENSSH V8.9-1B is referenced by VSI X86VMS OPENVMS V9.2

The two products listed above are tightly bound by a software dependency. If you override the recommendation to terminate the operation, the referenced product will be removed, but the referencing product will have an unsatisfied software dependency and may no longer function correctly. Please review the referencing product's documentation on requirements.

Answer YES to the following question to terminate the PRODUCT command.



## Appendix B. Sample Installation and Upgrade Logs

---

However, if you are sure you want to remove the referenced product then answer NO to continue the operation.

Terminating is strongly recommended. Do you want to terminate? [YES] n

The following product will be removed from destination:

VSI X86VMS OPENSSH V8.9-1B                      DISK\$MYN92\_921:[VMS\$COMMON.]

Portion done: 0%

%CREATE-E-DIRNOTCRE, SYS\$COMMON:[SYSUPD.SSH\$SAFETY] directory file not created  
-SYSTEM-F-ILLIOFUNC, illegal I/O function code

%PCSI-I-SPAWNEXE, error executing: @PCSI\$DESTINATION:[OPENS\$SSH.BIN]SSH  
\$RUN\_CLEANUP\_PROCEDURE.COM

Portion done: 20%

%PCSI-E-EXERMVFAIL, product supplied EXECUTE REMOVE procedure failed  
-CREATE-E-DIRNOTCRE, !AS directory file not created

%PCSI-E-OPFAILED, operation failed

Terminating is strongly recommended. Do you want to terminate? [YES] n

Portion done: 30%...40%...50%...60%...70%...80%...90%...100%

The following product has been removed:

VSI X86VMS OPENSSH V8.9-1B                      Layered Product

%PCSIUI-I-COMPWERR, operation completed after explicit continuation from errors

The remove operation is now complete.

Process X86VMS\_INST\_LP logged out at 27-FEB-2023 21:48:38.25

Press Return to continue...

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system  
or you can install or upgrade layered products that are included  
on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform  
"standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?) 1

\*\*\*\*\*

This procedure will ask a series of questions.

() - encloses acceptable answers  
[] - encloses default answers

Type your response and press the <Return> key. Type:

? - to repeat an explanation  
^ - to change prior input (not always possible)  
Ctrl/Y - to exit the installation procedure

This procedure installs the OpenVMS X86-64 operating system.

## Appendix B. Sample Installation and Upgrade Logs

---

All software and data files that were previously on the target disk will be removed.

Do you want to INITIALIZE or to PRESERVE? [PRESERVE]

You must enter the device name for the target disk on which OpenVMS X86-64 will be installed.

Enter device name for target disk: [DKD300:] (? for choices)

DKD300: is now labeled EXO92\_921.

Do you want to keep this label? (Yes/No) [Yes]

OpenVMS X86-64 will be upgraded on DKD300:.

The following products are part of the OpenVMS installation; if necessary they will be installed or upgraded along with the OpenVMS operating system.

- o Availability Manager (base) for OpenVMS X86-64
- o TCP/IP Services for OpenVMS X86-64
- o KERBEROS for OpenVMS X86-64
- o SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7)
- o SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)
- o OpenSSH for OpenVMS X86-64
- o 64-bit PERL for OpenVMS X86-64

If necessary, the following optional products will also be upgraded along with the OpenVMS operating system.

- o DECwindows Motif for OpenVMS X86-64
- o DECnet-Plus for OpenVMS X86-64
- o DECnet Phase IV for OpenVMS X86-64

If you want to add or delete optional products, you can do so later in the upgrade by answering "NO" to the following question:

"Do you want the defaults for all options?"

Availability Manager (base) for OpenVMS X86-64 is installed on your system. It will be upgraded.

TCP/IP Services for OpenVMS X86-64 is installed on your system. It will be upgraded.

KERBEROS for OpenVMS X86-64 is installed on your system. It will be upgraded.

SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7) is required. It will be installed.

SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)

is installed on your system. It will be upgraded.

OpenSSH for OpenVMS X86-64 is required.  
It will be installed.

64-bit PERL for OpenVMS X86-64 T5.34-0  
is already installed on your system. An upgrade is not required.

DECwindows Motif for OpenVMS X86-64 V1.8  
is already installed on your system. An upgrade is not required.

The DECnet-Plus kit is provided with the OpenVMS operating system kit.  
DECnet Phase IV applications are supported by DECnet-Plus.

DECnet Phase IV is also provided as an option.

If you install DECnet-Plus and TCP/IP you can run DECnet  
applications over a TCP/IP network. Please refer to the  
VSI DECnet-Plus for OpenVMS Planning Guide for information  
on running DECnet over TCP/IP.

Do you want to install DECnet-Plus for OpenVMS X86-64 V9.2-D?  
(Yes/No) [Yes] n

DECnet Phase IV for OpenVMS X86-64  
is installed on your system. It will be upgraded.

The installation operation can provide brief or detailed descriptions.  
In either case, you can request the detailed descriptions by typing ?.

Do you always want detailed descriptions? (Yes/No) [No]

Preserving existing copies of STARTUP.NSH if found...

No STARTUP.NSH files were found in the EFI system partition file

The following product has been selected:  
VSI X86VMS OPENVMS V9.2-1                      Platform (product suite)

Configuration phase starting ...

You will be asked to choose options, if any, for each selected product and for  
any products that may be installed to satisfy software dependency requirements.

Configuring VSI X86VMS OPENVMS V9.2-1: OPENVMS and related products Platform

Copyright 2015-2023 VMS Software, Inc.

VMS Software, Inc.

Do you want the defaults for all options? [YES]

## Appendix B. Sample Installation and Upgrade Logs

---

Availability Manager (base) for OpenVMS X86-64

TCP/IP Services for OpenVMS X86-64

\* Product VSI X86VMS TCPIP X6.0-20 requires a system reboot.  
Can the system be REBOOTED after the installation completes? [YES]

KERBEROS for OpenVMS X86-64

SSL3 V3.0-7 for OpenVMS X86-64 (based on OpenSSL V3.0.7)

SSL111 V1.1-1S for OpenVMS X86-64 (based on OpenSSL V1.1.1s)

OpenSSH for OpenVMS X86-64

64-bit PERL for OpenVMS X86-64

Do you want to review the options? [NO]

Execution phase starting ...

%PCSI-W-VERRES, version types W through Z are reserved for VMS internal use  
-PCSI-W-VERINS, the installation of product VSI X86VMS TCPIP X6.0-20  
-PCSI-W-VERREM, will remove current product VSI X86VMS TCPIP X6.0-16  
Do you want to continue? [YES]

The following products will be installed to destinations:

VSI X86VMS AVAIL_MAN_BASE V9.2-1	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS DECNET_PHASE_IV V9.2-1	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS DWMOTIF_SUPPORT V9.2-1	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS KERBEROS V3.3-2A	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS OPENSSH V8.9-1D	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS OPENVMS V9.2-1	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS SSL111 V1.1-1S	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS SSL3 V3.0-7	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS TCPIP X6.0-20	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS VMS V9.2-1	DISK\$EXO92_921:[VMS\$COMMON.]

The following products will be removed from destinations:

VSI X86VMS AVAIL_MAN_BASE V9.2	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS DECNET_PHASE_IV V9.2	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS DWMOTIF_SUPPORT V9.2	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS KERBEROS V3.3-2	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS OPENVMS V9.2	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS SSL111 V1.1-1N	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS TCPIP X6.0-16	DISK\$EXO92_921:[VMS\$COMMON.]
VSI X86VMS VMS V9.2	DISK\$EXO92_921:[VMS\$COMMON.]

Portion done: 0%...10%...20%...30%...40%...50%...60%...70%...80%

Restoring STARTUP.NSH file(s)...

No files restored

...90%...100%

The following products have been installed:

VSI X86VMS AVAIL_MAN_BASE V9.2-1	Layered Product
VSI X86VMS DECNET_PHASE_IV V9.2-1	Layered Product
VSI X86VMS DWMOTIF_SUPPORT V9.2-1	Layered Product
VSI X86VMS KERBEROS V3.3-2A	Layered Product
VSI X86VMS OPENSSH V8.9-1D	Layered Product
VSI X86VMS OPENVMS V9.2-1	Platform (product suite)
VSI X86VMS SSL111 V1.1-1S	Layered Product
VSI X86VMS SSL3 V3.0-7	Layered Product
VSI X86VMS TCPIP X6.0-20	Layered Product
VSI X86VMS VMS V9.2-1	Operating System

The following products have been removed:

VSI X86VMS AVAIL_MAN_BASE V9.2	Layered Product
VSI X86VMS DECNET_PHASE_IV V9.2	Layered Product

VSI X86VMS DWMOTIF_SUPPORT V9.2	Layered Product
VSI X86VMS KERBEROS V3.3-2	Layered Product
VSI X86VMS OPENVMS V9.2	Platform (product suite)
VSI X86VMS SSL111 V1.1-1N	Layered Product
VSI X86VMS TCPIP X6.0-16	Layered Product
VSI X86VMS VMS V9.2	Operating System

VSI X86VMS OPENVMS V9.2-1: OPENVMS and related products Platform

VSI X86VMS TCPIP X6.0-20: VSI TCP/IP Services for OpenVMS.

VSI X86VMS SSL3 V3.0-7: SSL3 for OpenVMS X86-64 V3.0-7 (Based on OpenSSL 3.0.7)

Insert the following lines in SYS\$MANAGER:SYSTARTUP\_VMS.COM:

```
@SYS$STARTUP:SSL3$STARTUP.COM
```

Insert the following lines in SYS\$MANAGER:SYSHUTDOWN.COM:

```
@SYS$STARTUP:SSL3$SHUTDOWN.COM
```

Review the Installation Guide and Release Notes for post install directions.

Review the Installation Guide and Release Notes for post upgrade verification suggestions.

Refer to SYS\$HELP:SSL30-7-X86.RELEASE\_NOTES for more information.

It is recommended to run extended IVP tests as a post-installation step.

Check the release notes for current status of the product.

VSI X86VMS KERBEROS V3.3-2A

Configure and set up Kerberos

If Kerberos will be run on this system, but has not been used previously, you need to perform the following steps.

- o Run the Kerberos configuration procedure:

```
@SYS$STARTUP:KRB$CONFIGURE.COM
```

- o Add the following line to SYS\$MANAGER:SYSTARTUP\_VMS.COM:

```
$ @SYS$STARTUP:KRB$STARTUP
```

- o Add the following line to SYS\$MANAGER:SYLOGIN.COM:

```
$ @SYS$MANAGER:KRB$SYMBOLS
```

VSI X86VMS SSL3 V3.0-7: SSL3 for OpenVMS X86-64 V3.0-7 (Based on OpenSSL 3.0.7)

Insert the following lines in SYS\$MANAGER:SYSTARTUP\_VMS.COM:

```
@SYS$STARTUP:SSL3$STARTUP.COM
```

Insert the following lines in SYS\$MANAGER:SYSHUTDOWN.COM:

```
@SYS$STARTUP:SSL3$SHUTDOWN.COM
```

Review the Installation Guide and Release Notes for post install directions.

Review the Installation Guide and Release Notes for post upgrade verification suggestions.

Refer to SYS\$HELP:SSL30-7-X86.RELEASE\_NOTES for more information.

It is recommended to run extended IVP tests as a post-installation step.

VSI X86VMS SSL111 V1.1-1S: SSL111 for OpenVMS X86-64 V1.1-1S (Based on OpenSSL 1.1.1S)

Review the Installation Guide and Release Notes for post install directions.

## Appendix B. Sample Installation and Upgrade Logs

---

Review the Installation Guide and Release Notes for post upgrade verification suggestions.

Refer to SYS\$HELP:SSL111-S-X86.RELEASE\_NOTES for more information.

%PCSI-I-SYSTEM\_REBOOT, executing reboot procedure ...

Shutdown/reboot deferred when this product is installed as part of the O/S installation/upgrade

%PCSI-I-SYSTEM\_REBOOT, executing reboot procedure ...

Running SYS\$UPDATE:SYS\$MD.COM to update the memory disk...

Created memory disk DKD300:[VMS\$COMMON.SYS\$LDR]SYS\$MD.DSK;2  
- using 181680 blocks in 1 extent with 1006 spare blocks  
- mounted on LDM1554: with volume label MD2305833FBB  
- contains OpenVMS V9.2-1

The upgrade is now complete.

When the newly upgraded system is first booted, a special startup procedure will be run. This procedure will:

- o Run AUTOGEN to set system parameters.
- o Reboot the system with the newly set parameters.

You may shut down now or continue with other operations.

Process X86VMS\_INSTALL logged out at 27-FEB-2023 21:54:33.38

Press Return to continue...

\*\*\*\*\*

You can install or upgrade the OpenVMS X86-64 operating system or you can install or upgrade layered products that are included on the OpenVMS X86-64 distribution media.

You can also execute DCL commands and procedures to perform "standalone" tasks, such as backing up the system disk.

Please choose one of the following:

- 1) Upgrade, install or reconfigure OpenVMS X86-64 Version V9.2-1
- 2) Display layered products that this procedure can install
- 3) Install or upgrade layered products
- 4) Show installed products
- 5) Reconfigure installed products
- 6) Remove installed products
- 7) Find, Install or Undo patches; Show or Delete Recovery Data
- 8) Execute DCL commands and procedures
- 9) Shut down this system

Enter CHOICE or ? for help: (1/2/3/4/5/6/7/8/9/?) 9

Shutting down the system

VSI Dump Kernel SYSBOOT Jan 23 2023 14:03:45  
\*\* Error logs not dumped, system disk is write locked.

SYSTEM SHUTDOWN COMPLETE

## Appendix B. Sample Installation and Upgrade Logs

---

\*\*\*\* Hit any key to reboot system \*\*\*\*

Restarting the system...

VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing  
ENABLED: Crash Dump Processing  
ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:  
PASSED

BOOT MANAGER DEVICE: DKB0  
DEFAULT BOOT COMMAND: BOOT DKD300 0 00000001

VIRTUAL MACHINE GUEST:  
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.  
Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

DKA0	(HD) = FS0	UEFI: X9_2_XG8Z	VMS: EXO_XG8Z	8192	MB	SCSI Disk
DKB100	(HD) = FS1	UEFI: E9_2_1	VMS: EXO_921-214	8192	MB	SATA Disk
DKD100	(HD) = FS2	UEFI: V9_2	VMS: EXO_XG9N-JN6	8192	MB	SCSI Disk
DKD300	(HD) = FS3	UEFI: E9_2_1	VMS: EXO92_921	8192	MB	SCSI Disk
DKB0	(DVD) = FS4	UEFI: E9_2_1	VMS: None	1574	MB	SATA DVD

BOOTMGR> EXIT

VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing  
ENABLED: Crash Dump Processing  
ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:  
PASSED

BOOT MANAGER DEVICE: DKD300  
DEFAULT BOOT COMMAND: BOOT DKD300 0 00000001

VIRTUAL MACHINE GUEST:  
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.  
Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

DKA0	(HD) = FS0	UEFI: X9_2_XG8Z	VMS: EXO_XG8Z	8192	MB	SCSI Disk
DKB100	(HD) = FS1	UEFI: E9_2_1	VMS: EXO_921-214	8192	MB	SATA Disk
DKD100	(HD) = FS2	UEFI: V9_2	VMS: EXO_XG9N-JN6	8192	MB	SCSI Disk
DKD300	(HD) = FS3	UEFI: E9_2_1	VMS: EXO92_921	8192	MB	SCSI Disk
DKB0	(DVD) = FS4	UEFI: E9_2_1	VMS: None	1574	MB	SATA DVD

BOOTMGR> BOOT DKD300

## Appendix B. Sample Installation and Upgrade Logs

---

Booting...

%%%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%%

---

GRAPHICAL OUTPUT HAS BEEN SUSPENDED  
USE A TERMINAL UTILITY FOR ACCESS

---

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

%SYSBOOT-I-VMTYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

VMS Software, Inc. OpenVMS (TM) x86\_64 Operating System, V9.2-1  
Copyright 2023 VMS Software, Inc.

MDS Mitigation active, variant verw(MD\_CLEAR)

%SMP-I-CPUTRN, CPU #3 has joined the active set.  
%SMP-I-CPUTRN, CPU #1 has joined the active set.  
%SMP-I-CPUTRN, CPU #2 has joined the active set.  
%VMScLuster-I-LOADSECDB, loading the cluster security database  
%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04  
%MSCPLoad-I-CONFIGSCAN, enabled automatic disk serving  
%SYSINIT-I- waiting to form or join an OpenVMS Cluster  
%CNXMAN, Sending VMScLuster membership request to system MYNODE2  
%CNXMAN, Now a VMScLuster member -- system MYNODE

Installing required known files...

Configuring devices...

%RUN-S-PROC\_ID, identification of created process is 20800408  
%STARTUP-E-NOPAGFIL, No page files have been successfully installed.  
%SYSTEM-I-BOOTUPGRADE, security auditing disabled  
%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.39 %%%%%%%%%%%  
Operator \_MYNODE\$OPA0: has been enabled, username SYSTEM

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.39 %%%%%%%%%%%  
Operator status for operator \_MYNODE\$OPA0:  
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,  
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,  
OPER11, OPER12

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.40 %%%%%%%%%%%  
Logfile has been initialized by operator \_MYNODE\$OPA0:  
Logfile is MYNODE::SYS\$SYSROOT:[SYSMGR]OPERATOR.LOG;4

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.40 %%%%%%%%%%%  
Operator status for operator MYNODE::SYS\$SYSROOT:[SYSMGR]OPERATOR.LOG;4  
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,  
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,  
OPER11, OPER12

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.41 %%%%%%%%%%%  
22:15:35.45 Node MYNODE (csid 00010004) is now a VMScLuster member

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.44 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%JBC-E-OPENERR, error opening SYS\$COMMON:[SYSEXE]QMAN\$MASTER.DAT;

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:18.44 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
-RMS-E-FNF, file not found



## Appendix B. Sample Installation and Upgrade Logs

---

```
%LICENSE-W-TERM, OPENVMS-X86-HAOE VSI-MICHAELWZAHAR-10MAY2022 License has terminated
%OPCOM 27-FEB-2023 22:19:18.49 %OPCOM
Message from user SYSTEM on MYNODE
%LICENSE-E-TERM, OPENVMS-X86-HAOE VSI-MICHAELWZAHAR-10MAY2022 License has terminated
```

```
%SYSTEM-I-BOOTUPGRADE, security server not started
%OPCOM 27-FEB-2023 22:19:18.58 %OPCOM
Message from user SYSTEM on MYNODE
TDF-I-SETTDF TDF set new timezone differential
```

```
%OPCOM 27-FEB-2023 22:19:18.78 %OPCOM
Message from user SYSTEM on MYNODE
%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager
```

```
%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager
Startup processing continuing...
```

```
%OPCOM 27-FEB-2023 22:19:18.80 %OPCOM
Message from user SYSTEM on MYNODE
%LICENSE-E-NOAUTH, VSI VMSCLUSTER use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager
```

```
%LICENSE-E-NOAUTH, VSI VMSCLUSTER use is not authorized on this node
-LICENSE-F-NOLICENSE, no license is active for this software product
-LICENSE-I-SYSMGR, please see your system manager
Startup processing continuing...
```

```
%SYSTEM-I-BOOTUPGRADE, Coordinated Startup not performed
%OPCOM 27-FEB-2023 22:19:19.13 %OPCOM
Operator _MYNOD2$OPA0: has been enabled, username SYSTEM
```

AUTOGEN will now be run to compute the new system parameters. The system will then shut down and reboot, and the installation or upgrade will be complete.

After rebooting you can continue with such system management tasks as:

```
Configuring networking software (TCP/IP Services, DECnet, other)
Using SYS$MANAGER:CLUSTER_CONFIG.COM to create an OpenVMS Cluster
Creating FIELD, SYSTEST and SYSTEST_CLIG accounts if needed
```

```
%AUTOGEN-I-BEGIN, GETDATA phase is beginning.
%AUTOGEN-I-NEWFILE, A new version of SYS$SYSTEM:PARAMS.DAT has been created.
You may wish to purge this file.
%AUTOGEN-I-END, GETDATA phase has successfully completed.
%AUTOGEN-I-BEGIN, GENPARAMS phase is beginning.
%AUTOGEN-I-NEWFILE, A new version of SYS$MANAGER:VMSIMAGES.DAT has been created.
You may wish to purge this file.
%OPCOM 27-FEB-2023 22:19:28.20 %OPCOM
Message from user SYSTEM on MYNODE
```

```
%CSP-I-DIFSWVER, different versions of VMS exist in cluster
```

```
%AUTOGEN-I-NEWFILE, A new version of SYS$SYSTEM:SETPARAMS.DAT has been created.
You may wish to purge this file.
%AUTOGEN-I-END, GENPARAMS phase has successfully completed.
```

## Appendix B. Sample Installation and Upgrade Logs

---

```
%AUTOGEN-I-BEGIN, GENFILES phase is beginning.
%SYSGEN-I-CREATED, SYS$$SYSROOT:[SYSEXE]SYS$ERRLOG.DMP;4 created

*****
%AUTOGEN-W-REPORT, Warnings were detected by AUTOGEN. Please review the
    information given in the file SYS$SYSTEM:AGEN$PARAMS.REPORT
*****

%AUTOGEN-I-REPORT, AUTOGEN has produced some informational messages which
    have been stored in the file SYS$SYSTEM:AGEN$PARAMS.REPORT. You may
    wish to review the information in that file.

%AUTOGEN-I-END, GENFILES phase has successfully completed.
%AUTOGEN-I-BEGIN, SETPARAMS phase is beginning.
%%%%%%%%%% OPCOM 27-FEB-2023 22:19:29.51 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%SYSGEN-I-WRITECUR, CURRENT system parameters modified by process ID 20800405 in
to file SYS$$SYSROOT_MD:[SYSEXE]X86_64VMSSYS.PAR;1

%AUTOGEN-I-SYSGEN, parameters modified
%AUTOGEN-I-END, SETPARAMS phase has successfully completed.
%AUTOGEN-I-BEGIN, REBOOT phase is beginning.

The system is shutting down to allow the system to boot with the
generated site-specific parameters and installed images.

The system will automatically reboot after the shutdown and the
upgrade will be complete.

                SHUTDOWN -- Perform an Orderly System Shutdown
                    on node MYNODE

%SHUTDOWN-I-BOOTCHECK, performing reboot consistency check...
%SHUTDOWN-I-CHECKOK, basic reboot consistency check completed

%SHUTDOWN-I-OPERATOR, this terminal is now an operator's console
%SHUTDOWN-I-DISLOGINS, interactive logins will now be disabled
%SET-I-INTSET, login interactive limit = 0, current interactive value = 0
%SHUTDOWN-I-STOPQUEUES, the queues on this node will now be stopped
%%%%%%%%%% OPCOM 27-FEB-2023 22:19:29.95 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%JBC-E-OPENERR, error opening SYS$COMMON:[SYSEXE]QMAN$MASTER.DAT;

%%%%%%%%%% OPCOM 27-FEB-2023 22:19:29.95 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
-RMS-E-FNF, file not found

SHUTDOWN message on MYNODE from user SYSTEM at MYNODE Batch 22:19:30
MYNODE will shut down in 0 minutes; back up soon. Please log off node MYNODE.
Reboot system with AUTOGENerated parameters

%SHUTDOWN-I-STOPUSER, all user processes will now be stopped
%SHUTDOWN-I-STOFSMISRV, the SMI server will now be shut down
%SHUTDOWN-I-STOPCPU, the secondary processors will now be stopped
%SMP-I-CPUTRN, CPU #1 was removed from the active set.
%SMP-I-CPUTRN, CPU #2 was removed from the active set.
%SMP-I-CPUTRN, CPU #3 was removed from the active set.
%SHUTDOWN-I-REMOVE, all installed images will now be removed
%SET-I-PSXROOSET, system POSIX root set to SYS$SYSDVICE:[000000]
%SHUTDOWN-I-DISMOUNT, all volumes will now be dismounted
%%%%%%%%%% OPCOM 27-FEB-2023 22:19:30.30 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
STARTUP, MYNODE shutdown was requested by the operator.
```

## Appendix B. Sample Installation and Upgrade Logs

---

Quorum: 2 (of 2 votes); this node contributes 1 vote  
Cluster has no voting quorum disk.

Setting this node's VOTES to zero & adjusting quorum.  
%CNXMAN, Proposing modification of quorum or quorum disk membership  
%%%%%%%% OPCOM 27-FEB-2023 22:19:43.00 %%%%%%%%%  
22:19:43.00 Node MYNODE (csid 00010004) proposed modification of quorum or quorum disk membership

%CNXMAN, Completing VMScluster state transition  
%%%%%%%% OPCOM 27-FEB-2023 22:19:43.00 %%%%%%%%%  
22:19:43.00 Node MYNODE (csid 00010004) completed VMScluster state transition

Quorum: 1 (of 1 vote); this node contributes 0 votes  
Cluster has no voting quorum disk.

VSI Dump Kernel SYSBOOT Jan 23 2023 14:03:45  
\*\* Dumping error logs to the system disk (\$40\$DKD300:)  
\*\* Error logs dumped to \$40\$DKD300:[SYS0.SYSEXE]SYS\$ERRLOG.DMP  
\*\* (used 84 out of 96 available blocks)

Restarting the system...

VSI OpenVMS Boot Manager: V9.2-1, Build 122

ENABLED: Symmetric Multi-Processing  
ENABLED: Crash Dump Processing  
ENABLED: Console output to Legacy COM 1 Port

Checking Required Processor Features:  
PASSED

BOOT MANAGER DEVICE: DKD300  
DEFAULT BOOT COMMAND: BOOT DKD300 0 00000001

VIRTUAL MACHINE GUEST:  
VMware (tm) No Mouse support; Use Commands or Arrow Keys

CONNECT A REMOTE TERMINAL SESSION NOW.  
Enter the TERMINAL command for remote connection assistance.

BOOTMGR> DEVICES

BOOTABLE DEVICES (System Disks, Installation Kits, other):

DKA0	(HD) = FS0	UEFI: X9_2_XG8Z	VMS: EXO_XG8Z	8192	MB	SCSI Disk
DKB100	(HD) = FS1	UEFI: E9_2_1	VMS: EXO_921-214	8192	MB	SATA Disk
DKD100	(HD) = FS2	UEFI: V9_2	VMS: EXO_XG9N-JN6	8192	MB	SCSI Disk
DKD300	(HD) = FS3	UEFI: E9_2_1	VMS: EXO92_921	8192	MB	SCSI Disk
DKB0	(DVD) = FS4	UEFI: E9_2_1	VMS: None	1574	MB	SATA DVD

BOOTMGR> BOOT DKD300  
Booting...

%%%%%%%% VSI OpenVMS (tm) x86-64 %%%%%%%%%

---

GRAPHICAL OUTPUT HAS BEEN SUSPENDED  
USE A TERMINAL UTILITY FOR ACCESS

---

VSI Primary Kernel SYSBOOT Jan 23 2023 14:03:45

---

## Appendix B. Sample Installation and Upgrade Logs

---

```
%SYSBOOT-I-VMATYPE, Booting as a VMware (tm) Guest

SYSBOOT> C

      VMS Software, Inc. OpenVMS (TM) x86_64 Operating System, V9.2-1
      Copyright 2023 VMS Software, Inc.

      MDS Mitigation active, variant verw(MD_CLEAR)

%SMP-I-CPUTRN, CPU #3 has joined the active set.
%SMP-I-CPUTRN, CPU #2 has joined the active set.
%SMP-I-CPUTRN, CPU #1 has joined the active set.
%VMScluster-I-LOADSECDB, loading the cluster security database
%EIA0, Link up: 1000 mbit, fdx, flow control (rcv only), 00-0C-29-AB-A3-04
%MSCPLOAD-I-CONFIGSCAN, enabled automatic disk serving
%SYSINIT-I- waiting to form or join an OpenVMS Cluster
%CNXMAN, Sending VMScluster membership request to system MYNOD2
%CNXMAN, Now a VMScluster member -- system MYNODE
%STDRV-I-STARTUP, OpenVMS startup begun at 27-FEB-2023 22:21:00.30
%MSCPLOAD-I-CONFIGSCAN, enabled automatic disk serving
%RUN-S-PROC_ID, identification of created process is 20A00409
%RUN-S-PROC_ID, identification of created process is 20A0040A
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.14 %%%%%%%%%%%
Operator _MYNODE$OPA0: has been enabled, username SYSTEM

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.14 %%%%%%%%%%%
Operator status for operator _MYNODE$OPA0:
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,
OPER11, OPER12

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.17 %%%%%%%%%%%
Logfile has been initialized by operator _MYNODE$OPA0:
Logfile is MYNODE::SYS$SYSROOT:[SYSMGR]OPERATOR.LOG;5

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.17 %%%%%%%%%%%
Operator status for operator MYNODE::SYS$SYSROOT:[SYSMGR]OPERATOR.LOG;5
CENTRAL, PRINTER, TAPES, DISKS, DEVICES, CARDS, NETWORK, CLUSTER, SECURITY,
LICENSE, OPER1, OPER2, OPER3, OPER4, OPER5, OPER6, OPER7, OPER8, OPER9, OPER10,
OPER11, OPER12

%SET-I-NEWAUDSRV, identification of new audit server process is 20A00410
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.18 %%%%%%%%%%%
22:20:59.47 Node MYNODE (csid 00010005) is now a VMScluster member

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.18 %%%%%%%%%%%
Operator _MYNOD2$OPA0: has been enabled, username SYSTEM

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.23 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%JBC-E-OPENERR, error opening SYS$COMMON:[SYSEXE]QMAN$MASTER.DAT;

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.23 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
-RMS-E-FNF, file not found

%LICENSE-W-TERM, OPENVMS-X86-HAOE VSI-MICHAELWZAHAR-10MAY2022 License has termin
ated
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.26 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%LICENSE-E-TERM, OPENVMS-X86-HAOE VSI-MICHAELWZAHAR-10MAY2022 License has termin
ated

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.32 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%SECSRV-I-SERVERSTARTINGU, security server starting up

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.37 %%%%%%%%%%%
```

## Appendix B. Sample Installation and Upgrade Logs

---

Message from user SYSTEM on MYNODE  
%SECSRV-I-CIAEXISTCLU, security server using existing cluster intrusion database

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.37 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-CIASTARTINGUP, breakin detection and evasion processing now starting u  
p

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.37 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
TDF-I-SETTDF TDF set new timezone differential

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.57 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
Warning: DECdtm log file not found (SYS\$JOURNAL:SYSTEM\$MYNODE.LM\$JOURNAL)  
%RMS-E-FNF, file not found  
TP server process waiting

%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node  
-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager  
Startup processing continuing...

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.59 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%LICENSE-E-NOAUTH, VSI OPENVMS-X86 use is not authorized on this node  
-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:02.60 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%LICENSE-E-NOAUTH, VSI VMSCLUSTER use is not authorized on this node  
-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager

%LICENSE-E-NOAUTH, VSI VMSCLUSTER use is not authorized on this node  
-LICENSE-F-NOLICENSE, no license is active for this software product  
-LICENSE-I-SYSMGR, please see your system manager  
Startup processing continuing...

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:05.33 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-I-PROXYSTARTINGUP, proxy processing now starting up

%%%%%%%%%% OPCOM 27-FEB-2023 22:21:05.33 %%%%%%%%%%%  
Message from user SYSTEM on MYNODE  
%SECSRV-E-NOPROXYDB, cannot find proxy database file NET\$PROXY.DAT  
%RMS-E-FNF, file not found

%STARTUP-I-AUDITCONTINUE, audit server initialization complete  
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:06.07 %%%%%%%%%%%  
Message from user AUDIT\$SERVER on MYNODE  
Security alarm (SECURITY) and security audit (SECURITY) on MYNODE, system id: 14  
34  
Auditable event: Audit server starting up  
Event time: 27-FEB-2023 22:21:06.05  
PID: 20A00405  
Username: SYSTEM

The OpenVMS system is now executing the site-specific startup commands.

%SET-I-INTSET, login interactive limit = 64, current interactive value = 0

## Appendix B. Sample Installation and Upgrade Logs

---

```
%RUN-S-PROC_ID, identification of created process is 20A00418
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:06.55 %%%%%%%%%%%
Message from user SYSTEM on MYNODE
%SMHANDLER-S-STARTUP, server management event handler startup

SYSTEM      job terminated at 27-FEB-2023 22:21:08.56

Accounting information:
Buffered I/O count:          2988      Peak working set size:      13824
Direct I/O count:           1497      Peak virtual size:          278400
Page faults:                 3959      Mounted volumes:             0
Charged CPU time:           0 00:00:01.76  Elapsed time:               0 00:00:08.31

Welcome to OpenVMS (TM) x86_64 Operating System, Version V9.2-1

Username: syst
%%%%%%%%%% OPCOM 27-FEB-2023 22:21:11.77 %%%%%%%%%%%
Message from user SYSTEM on MYNODE

%CSP-I-DIFSWVER, different versions of VMS exist in cluster

Username: system
Password:
%LICENSE-I-NOLICENSE, no license is active for this software product
%LOGIN-I-NOVAXCLUSTER, VMSCUSTER license is not active
%LOGIN-S-LOGOPRCON, login allowed from OPA0:
VMS Software, Inc. OpenVMS (TM) x86_64 Operating System, V9.2-1
  Last interactive login on Friday, 10-JUN-2022 10:53:49.14
$
```